
ZE2016

1200/2000 Series - 16 Zone LED Extension Card With Fire And Fault LEDs Per Zone

General

The ZE2016 allows the extension of the visible zone indications of the FP2864 and FR2064 fire panels and repeaters by 16 additional zones.

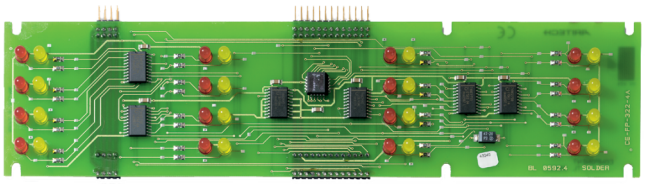

Details

- Extends the visual zone LED display by 16
- Provides fire and fault LEDs for every zone
- No configuration required
- Supplied with nuts and washers for easy installation

ZE2016

1200/2000 Series - 16 Zone LED Extension Card With Fire And Fault LEDs Per Zone

Technical specifications

Electrical

Current consumption	8 mA

Physical

Form factor	Medium
Physical dimensions	267 x 64 mm
Net weight	70 g

Environmental

Operating temperature	-10 to +50°C
Storage temperature	-10 to +70°C
Relative humidity	10 to 95%

Regulatory

Certification	EN54-2

KIDDE COMMERCIAL

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 1 September 2025 - 11:04