

# ZP2-F1-09

## Addressable Fire Panel - 1 Loop - Spanish

### Overview

The ZP2 Series life safety control systems are bringing the speed and functionality of high-end intelligent processing to small to mid-sized addressable applications. They feature an attractive contemporary design that fits with any decor. Special plastics allows for painting in any color and the easy to remove electronics will support in this matter. The gently lined door with the intuitive dark inset user interface and EN54 compliant graphical LCD offers a distinctive flair. The main controls are clearly, but discreetly highlighted with the focus on the central located Jog Dial.

With the addressable detection and a full line of easily configured option cards and modules, USB and Ethernet® connectivity, these quick-to-configure systems offer versatility that benefits building owners and life safety system installers alike.

### The Panel

The fire panels supplied in local language, with user interface, with 1 loop that supports up to 254 devices (127 addresses) in 512 zones, have standard 2 supervised sounder/fire-routing outputs, which can be used as freely programmable outputs as well. In addition 2 conventional relay outputs and 2 supervised outputs, working in pair and dedicated to common fire and fault conditions, as well as 2 user configurable inputs for monitoring and control are available.

### Options

The panels supports one network board to create a maximum of 32 nodes / 32 loops network of fire panels, fire panel repeaters (including conventional fire panels and fire panel repeaters up to a maximum of 64 conventional zones). Last but not least, in case separate zone indications are required, a 20 or 40 zone fire/fault LED indicator board can be mounted in the panel or repeater with ample space for text.

### Approvals & Compliance

- CE / CPD / EN54-2 / EN54-4
- NEN2535 / NBNS21-100 compliant
- BS5839-1 compliant
- VdS and LPCB certified
- WEEE / RoHS compliant



### Details

- 1 loop with up to 512 zones
- Up to 40 LED Zone indicators for Fire and Fault with ample text space
- Auto configuration and default EN54 setup modes
- Ethernet port with TCP/IP for remote maintenance and programming
- EN54 compliant graphical LCD with icons and symbols for easy recognition of events
- Jog Dial with 4 soft buttons for simple and intuitive user control
- Aesthetic pleasing design with special paintable synthetic door
- Easy removable door and chassis for quick and clean installation
- All pluggable connectors
- 3 USB ports with memory stick support and RS232 for printer support
- Email notification for events directly from the panel (4 user accounts)
- Auxiliary 24VDC supply output with reset support
- 3 operator level menu structure with username and password
- History log memory for 9999 events
- Up to 72 hours standby time and 30 minutes alarm
- Compatible with the Ziton loop powered sounders/beacons and base sounders and Ziton series detectors

# ZP2-F1-09

## Addressable Fire Panel - 1 Loop - Spanish

### Technical specifications

#### General

Maximum system capacity (device count)	up to 8128
Network size (nodes)	up to 64

#### Electrical

Power supply type	VAC
Operating voltage	110 / 230 VAC (+10%/-15%)
Current consumption	Nom. 0.6 / 1.3 A, Max. 1.5 / 3.15 A

#### Loop

Maximum loop capacity	1
-----------------------	---

#### Zone

Maximum zone capacity	up to 512
-----------------------	-----------

#### Standby battery

Capacity	Max. 2 x 12V/18Ah (use supplied cables)
----------	---

#### Physical

Form factor	Large
Physical dimensions	450 x 550 x 172 mm (W x H x D)
Net weight	7.4 kg (without battery)
Shipping weight	10.1 kg
Colour	Grey (RAL 7035)
Mounting type	Surface mount
Cable entries	18 (20mm) / 2 (20mm) / 2 removable plates (Top/Bottom/Back)

#### Environmental

Operating temperature	-8 to +42°C
Storage temperature	-10 to +50°C
Relative humidity	95% max. noncondensing
Environment	Indoor
IP rating	IP30: for indoor use only

#### Regulatory

Compliance	BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-21, EN54-4, VdS

#### Mains supply

Frequency	50 / 60 Hz (±5%)
Fuse rating	2 / 4 A
Cable type	3 x 1.5 mm <sup>2</sup> (live, neutral, earth)

#### Outputs


Programmable supervised	2, 750mA / 19.5-28VDC (24VDC nominal)
General Fire + Fault supervised	2, 350mA / 19.5-28VDC (24 VDC nominal)
General Fire + Fault relay	2
Aux	1 resetable, 500mA / 19.5-28VDC (24VDC nominal)
Cable type	Recommended 2 core 1.5 mm <sup>2</sup> twisted pair
End of Line resistor	15kohm

#### Inputs

Programmable	2
Cable type	Recommended 2 core 1.5 mm <sup>2</sup> twisted pair
End of Line resistor	15kohm
Maximum Load	150 mA

#### Loops

Outputs	1, 300mA@11VDC (peak 500mA@20V)
Cable length	max 52ohms / 500nF (max 2km with 2mm <sup>2</sup> and 127 detectors)
Cable type	Recommended 2 core 1.5 mm <sup>2</sup> twisted pair

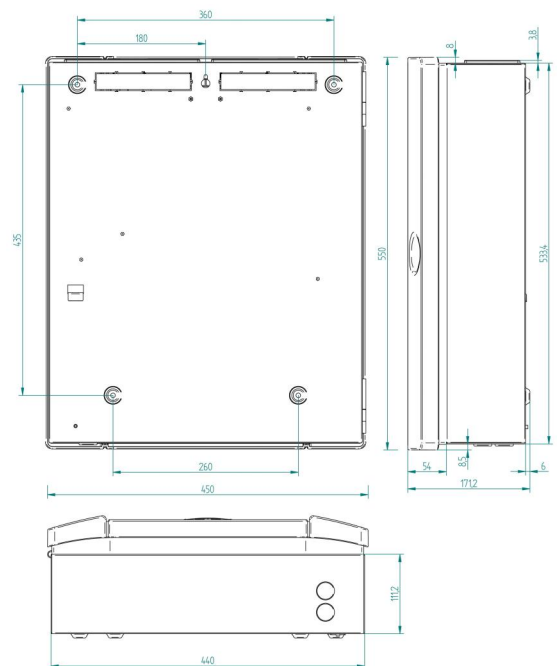

As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit [firesecurityproducts.com](http://firesecurityproducts.com) online or contact your sales representative.

Last updated on 15 March 2024 - 13:07