

# 2X-F1-FB2-S-46

## Central de incendio analógica Aritech con controles para bomberos - 1 lazo - caja pequeña. (Alemán Int).

### Overview

The 2X Series life safety control systems are bringing the speed and functionality of high-end intelligent processing to small to mid-sized addressable applications. They feature an attractive contemporary design that fits with any decor. Special plastics allows for painting in any color and the easy to remove electronics will support in this matter. The gently lined door with the intuitive dark inset user interface and EN54 compliant graphical LCD offers a distinctive flair. The main controls are clearly, but discreetly highlighted with the focus on the central located Jog Dial.

With the addressable detection and a full line of easily configured option cards and modules, USB and Ethernet® connectivity, these quick-to-configure systems offer versatility that benefits building owners and life safety system installers alike.

### The Panel

The fire panels supplied in local language, with user interface with fire brigade and fire protection controls, with 1 loop that supports up to 128 devices in 512 zones, have standard 2 supervised sounder/fire-routing outputs, which can be used as freely programmable outputs as well. In addition 2 conventional relay outputs and 2 supervised outputs, working in pair and dedicated to common fire and fault conditions, as well as 2 user configurable inputs for monitoring and control are available.

### Options

The panels supports one network board to create a maximum of 32 nodes / 32 loops network of fire panels and fire panel repeaters (including conventional fire panels and fire panel repeaters up to a maximum of 64 conventional zones). Last but not least, in case separate zone indications are required, a 24 zone fire/fault LED indicator board can be mounted in the panel or repeater with space for a 4 digit number.

### Approvals & Compliance

- CE / CPD / EN54-2 / EN54-4 / EN54-21
- NEN2535 / NBNS21-100 compliant
- BS5839-1 compliant
- VdS and LPCB certified
- WEEE / RoHS compliant



### Detalles

- 1 loop with up to 512 zones with Fire Brigade & Fire Protection controls and 300 output groups
- Up to 24 LED Zone indicators for Fire and Fault with space for a 4 digit number
- Auto configuration, setup wizards and default EN54 setup modes
- Ethernet port with TCP/IP for remote diagnostics, maintenance and programming
- EN54 compliant graphical LCD with icons and up to 256 zones
- Jog Dial with 4 soft buttons for simple and intuitive user control
- Aesthetic pleasing design with special paintable synthetic door
- Easy removable door and chassis for quick and clean installation
- All pluggable connectors
- 3 USB ports with memory stick support and RS232 for printer support
- Email notification for events directly from the panel (4 user accounts)
- Auxiliary 24VDC supply output with reset support
- 3 operator level menu structure (20 usernames and passwords)
- History log memory for 9999 events
- Up to 24 hours standby time and 30 minutes alarm
- Compatible with the new loop powered sounders/beacons and base sounders and the 2000 series detectors with replaceable optical chamber

# 2X-F1-FB2-S-46

Central de incendio analógica Aritech con controles para bomberos - 1 lazo - caja pequeña.  
(Aleman Int).

## Especificaciones técnicas

### General

Maximum system capacity (device count)	hasta 8192
Network size (nodes)	hasta 64

### Eléctrico

Tipo de fuente de alimentación	VAC
Operating voltage	110/230 VAC (+10%/-15%) 50 / 60 Hz (±5%)
Consumo de corriente	Nom. 0.6 / 1.3 A, Max. 1.5 / 3.15 A 2 / 4 A (fuse rating)

### Lazo

Capacidad máxima del lazo	1
Tipo e índice	Recommended 2 core 1.5 mm <sup>2</sup> twisted pair (cable)
Ratio del cable	52ohm / 500nF max. 2km (length)

### Zona

Maximum zone capacity	hasta 512
-----------------------	-----------

### Entrada

Ratio y tipo de entrada	150 mA (maximum load); Recommended 2 core 1.5 mm <sup>2</sup> twisted pair (cable)
Programable	2
Terminación	15 kohm (EOL resistor)

### Salida

Ratio y tipo de salida	Recommended 2 core 1.5 mm <sup>2</sup> twisted pair (cable)
Señalización de alarma de incendios	2 x General Fire + Fault relay
Potencia auxiliar	1 resetable, 500mA / 19.5-28VDC (24VDC nominal)
Programable	2, 750mA / 19.5-28VDC (24VDC nominal) (supervised)
Terminación	15 kohm (EOL resistor)

### Batería en reposo

Capacity	Max. 2 x 12V/7.2Ah (use supplied cables)
----------	--

### Físico

Form factor	Pequeño
Dimensiones físicas	410 x 298 x 162 mm (W x H x D)
Peso neto	5.2 kg (without battery)
Peso de envío	10.1 kg
Colour	Gris (RAL 7035)
Mounting type	Montaje en Superficie
Entradas de cable	9 (20mm) / 2 (20mm) / 2 removable plates (Top / Bottom / Back)

### Medioambiental

Operating temperature	-5 to +40°C
Temperatura de almacenamiento	-10 to +50°C
Relative humidity	95% max. noncondensing
Environment	Interior
IP rating	IP30: for indoor use only

### Regulador

Compliance	BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-21, EN54-4, VdS

### Electrical


Mains supply cable type	3 x 1.5 mm <sup>2</sup> (live, neutral, earth)
-------------------------	--

### Output

General Fire + Fault supervised	2, 350mA / 19.5-28VDC (24 VDC nominal)
---------------------------------	--

### Loop

Outputs	250 mA / 29VDC (29VDC to 36VDC )
---------	----------------------------------

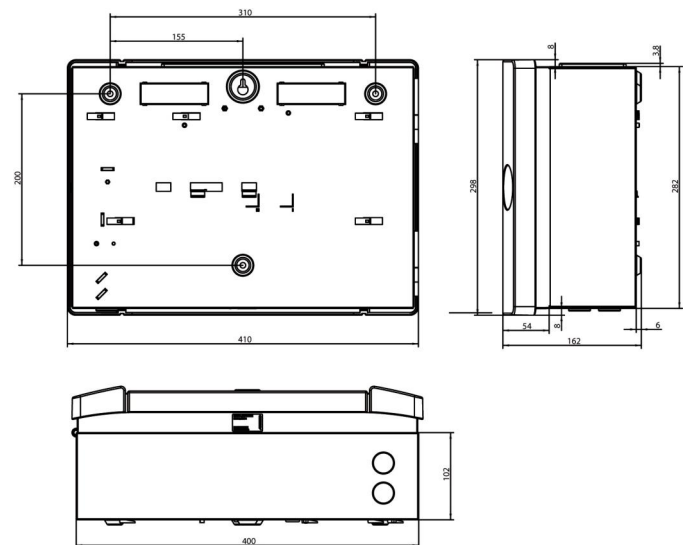

Como empresa innovadora, Carrier Fire & Security se reserva el derecho de modificar las especificaciones de los productos sin previo aviso. Para conocer las últimas especificaciones de los productos, visite la Web de [es.firesecurityproducts.com](http://es.firesecurityproducts.com) o póngase en contacto con su comercial.

Last updated on 16 February 2024 - 12:24