
DF955-C6

FlexZone Relay output Card

Description

The relay output card provides four additional relay outputs to the FlexZone processor.

The card can be used in conjunction with a communications card, a wireless receiver card, or a dry-contact input card.

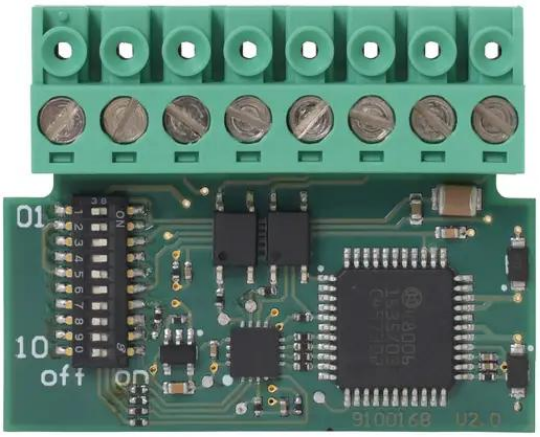

Details

- 4 relay outputs N.O/N.C
- Removable connector

DF955-C6

FlexZone Relay output Card

Technical specifications

General

Category	FlexZone

Inputs / outputs

No. of alarm outputs	4

Physical

Physical dimensions	76 x 67 x 18 mm
Net weight	47 g

Environmental

Operating temperature	-40 to 70°C

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 5 June 2026 - 12:27