

2X-F2-FB2-PRT-32

Addressable Fire Panel w/ Fire Brigade Controls with Printer- 2 Loop - French Belgian

Overview

The 2X Series life safety control systems are bringing the speed and functionality of high-end intelligent processing to small to mid-sized addressable applications. They feature an attractive contemporary design that fits with any decor. Special plastics allows for painting in any color and the easy to remove electronics will support in this matter. The gently lined door with the intuitive dark inset user interface and EN54 compliant graphical LCD offers a distinctive flair. The main controls are clearly, but discreetly highlighted with the focus on the central located Jog Dial. With the addressable detection and a full line of easily configured option cards and modules, USB and Ethernet® connectivity, these quick-to-configure systems offer versatility that benefits building owners and life safety system installers alike.

The Panel

The fire panels supplied in local language, with user interface with fire routing controls, with 2 loops that supports up to 256 devices in 512 zones, have standard 4 supervised sounder/fire-routing outputs, which can be used as freely programmable outputs as well. In addition 2 conventional relay outputs and 2 supervised outputs, working in pair and dedicated to common fire and fault conditions, as well as 2 user configurable inputs for monitoring and control are available. The build-in printer allows for printing live panel events or reports.

Options

The panel supports an extra 2 loop board that brings the panel up to 512 zones with 4 additional programmable outputs. Add a network board to create a maximum of 32 nodes / 32 loops network of fire panels and fire panel repeaters (including conventional fire panels and fire panel repeaters up to a maximum of 64 conventional zones). Last but not least, in case separate zone indications are required, a 20 or a 40 zone fire/fault LED indicator board can be mounted in the panel or repeater with ample space for custom text.

Approvals & Compliance

- CE / CPD / EN54-2 / EN54-4 / EN54-21
- NEN2535 / NBNS21-100 compliant
- BS5839-1 compliant
- VdS and LPCB certified
- WEEE / RoHS compliant



Détails

- Build-in thermal printer with paper replacement from the front
- 2 loops expandable to 4 with up to 512 zones with Fire Brigade & Fire Protection controls and 300 output groups
- Up to 40 LED Zone indicators for Fire and Fault with ample text space
- Auto configuration, setup wizard and default regional setup modes
- Ethernet port with TCP/IP for remote diagnostics, maintenance and programming
- EN54 compliant graphical LCD with icons and up to 256 zones
- Jog Dial with 4 soft buttons for simple and intuitive user control
- Aesthetic pleasing design with special paintable synthetic door
- Easy removable door and chassis for quick and clean installation
- All pluggable connectors
- 3 USB ports with memory stick support and RS232 for printer support
- Email notification for events directly from the panel (4 user accounts)
- Auxiliary 24VDC supply output with reset support
- 3 operator level menu structure (20 usernames and passwords)
- History log memory for 9999 events
- Up to 72 hours standby time and 30 minutes alarm
- Compatible with the new loop powered sounders/beacons and base sounders and the 2000 series detectors with replaceable optical chamber

2X-F2-FB2-PRT-32

Addressable Fire Panel w/ Fire Brigade Controls with Printer- 2 Loop - French Belgian

Spécifications techniques

Général

Capacité maximale du système (comptage de périphérique) jusqu'à 32768

Taille du réseau (nœuds) jusqu'à 64

Électrique

Power supply type VAC

Operating voltage 110/230 VAC (+10%/-15%)
50 / 60 Hz ($\pm 5\%$)

Current consumption Nom. 0.6 / 1.3 A, Max. 1.5 / 3.15 A
2 / 4 A (fuse rating)

Boucle

Capacité maximale de boucle de masse 4

Type et classe Recommended 2 core 1.5 mm² twisted pair (cable)

Cote de câble 56ohm / 1 μ F max. 2 km (length)

Zone

Capacité maximale de zone jusqu'à 512

Entrée

Type d'entrée et classe 150 mA (max. load); Recommended 2 core 1.5 mm² twisted pair (cable)

Programmable 2

Résiliation 15 kohm (EOL resistor)

Sortie

Type de sortie et classe Recommended 2 core 1.5 mm² twisted pair (cable)

Alarme incendie 2 x General Fire + Fault relay signalisation

Alimentation auxiliaire 1 resetable, 500mA / 19.5-28VDC (24VDC nominal)

Programmable 4, 750mA / 19.5-28VDC (24VDC nominal) (supervised)

Résiliation 15 kohm (EOL resistor)

Batterie de secours

Capacité Max. 2 x 12V/18Ah (use supplied cables)

Caractéristiques physiques

Types de format Large

Dimensions physiques 450 x 550 x 171 mm (W x H x D)

Poids net 7.4 kg (without battery)

Poids à l'expédition 10.1 kg

Colour Gris (RAL 7035)

Mounting type Montage en surface

Entrées de câble 18 (20mm) / 2 (20mm) / 2 removable plates (Top / Bottom / Back)

Environnement

Température de fonctionnement -8 to +42°C

Storage temperature -10 to +50°C

Relative humidity 95% max. noncondensing

Environnement Intérieur

IP rating IP30: for indoor use only

Régulateur

Conformité BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE

Certification EN54-13, EN54-2, EN54-21, EN54-4, VdS

Electrical


Mains supply cable type 3 x 1.5 mm² (live, neutral, earth)

Output

General Fire + Fault 2, 350mA / 19.5-28VDC (24 VDC nominal) supervised

Loop

Outputs 250 mA / 29VDC (29VDC to 36VDC)

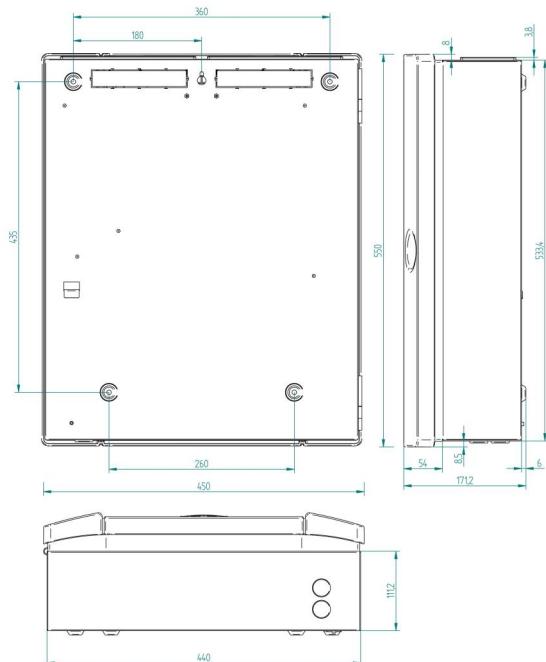

En tant que société d'innovation, Carrier Fire & Security se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site www.fr.firesecurityproducts.com ou contactez votre représentant commercial.