

ATS3700-RETRO-BUNDLE

Always On. Always Aware.
ATS3700-Upgrade kit

Product overview


Everon upgrade kit

Everon Upgrade Kit – ATS3700-MBC – ATS1125 – ATSx700-RETRO

Upgrade with confidence using the Everon Upgrade Kit, a ready-to-install package designed for a smooth and efficient transition to the Everon platform.

Unlike basic upgrade kits, this enhanced version includes a new ATS1125 keypad, making it a more complete solution for a seamless migration to Everon without the need for additional key components.

For even more robust and secure alarm transmission, GSM communication modules are available, providing reliable backup connectivity to keep your system online even if the primary network fails.

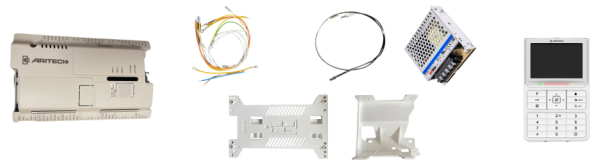

Details

- 1x Everon 3700-MBC (Panel PCB without housing)
- 1x ATSx700-RETRO (Upgrade kit)
- 1x ATS1125 (Keypad)

ATS3700-RETRO-BUNDLE

Always On. Always Aware.
ATS3700-Upgrade kit

Technical specifications

System

Product line	Everon
Product type	Integrated Access Control
Panel type	Hybrid
Kit	No
No. of keypads / readers	8
Data Gathering Panels (DGP)	7
No. of alarm groups	256
Specified cable	WCAT52 / WCAT54 or equivalent

Inputs

Max. no. of inputs	48
Onboard inputs	8
Inputs plug-in expansion	8
ATS1202 support	3

Outputs

No. of outputs	128
No. of onboard outputs	3 electronic outputs + 1 relay

Area

No. of areas	4
--------------	---

User / cards

Max. no. of users	more than 2000
Users with name	1000
Max. no. of cards	2000 to 65532
Max. no. of PIN codes	2000 to 65532

Access control

Standard doors on control panel	4
Door groups	128
Floor groups	128
Intelligent doors on 4-door DGPs	28

Communication

Onboard transmission type	IP
Transmission extension	GSM, GSM/GPRS, GSM/GPRS/IP, IP
Databus type	RS485

Event log

Alarm event log	14500
Access event log	10000

Electrical

Operating voltage	24 VDC
Mainboard current consumption	110 mA at 24 V (PSU), 160 mA at 12 V (battery)
Max. system current	950 mA at 13.8 V ± 0.2 V
Max. aux power current	2500 mA at 13.8 VDC ± 0.4 V
Auto-reset fuses	3 (electrical, 1.3A per use)
Glass break fuses	1 (mains power, T-2A 230 VAC, slow)

Physical

Physical dimensions	199 x 140 x 45 mm
Net weight	435 g

Environmental

Operating temperature	-10 to +55°C
Relative humidity	95% noncondensing
Environmental Class	Class II, indoor
IP rating	IP31

Regulatory

Compliance	CE
Certification	CE

Compatible products

Category	Reference	Description
Communication Devices	ATS7341	
Communication Devices	ATS7341-SIM	
Keypad	ATS1125	
Keypad	ATS1125-B	
Keypad	ATS1140	



As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 27 June 2025 - 9:04