

# 2X-F2-FB2-PRT-32

## Addressable Fire Panel w/ Fire Brigade Controls with Printer- 2 Loop - French Belgian

### Overview

The 2X Series life safety control systems are bringing the speed and functionality of high-end intelligent processing to small to mid-sized addressable applications. They feature an attractive contemporary design that fits with any decor. Special plastics allows for painting in any color and the easy to remove electronics will support in this matter. The gently lined door with the intuitive dark inset user interface and EN54 compliant graphical LCD offers a distinctive flair. The main controls are clearly, but discreetly highlighted with the focus on the central located Jog Dial. With the addressable detection and a full line of easily configured option cards and modules, USB and Ethernet® connectivity, these quick-to-configure systems offer versatility that benefits building owners and life safety system installers alike.

### The Panel

The fire panels supplied in local language, with user interface with fire routing controls, with 2 loops that supports up to 256 devices in 512 zones, have standard 4 supervised sounder/fire-routing outputs, which can be used as freely programmable outputs as well. In addition 2 conventional relay outputs and 2 supervised outputs, working in pair and dedicated to common fire and fault conditions, as well as 2 user configurable inputs for monitoring and control are available. The build-in printer allows for printing live panel events or reports.

### Options

The panel supports an extra 2 loop board that brings the panel to up to 512 zones with 4 additional programmable outputs. Add a network board to create a maximum of 32 nodes / 32 loops network of fire panels and fire panel repeaters (including conventional fire panels and fire panel repeaters up to a maximum of 64 conventional zones). Last but not least, in case separate zone indications are required, a 20 or a 40 zone fire/fault LED indicator board can be mounted in the panel or repeater with ample space for custom text.

### Approvals & Compliance

- CE / CPD / EN54-2 / EN54-4 / EN54-21
- NEN2535 / NBNS21-100 compliant
- BS5839-1 compliant
- VdS and LPCB certified
- WEEE / RoHS compliant



### Dettagli

- Build-in thermal printer with paper replacement from the front
- 2 loops expandable to 4 with up to 512 zones with Fire Brigade & Fire Protection controls and 300 output groups
- Up to 40 LED Zone indicators for Fire and Fault with ample text space
- Auto configuration, setup wizard and default regional setup modes
- Ethernet port with TCP/IP for remote diagnostics, maintenance and programming
- EN54 compliant graphical LCD with icons and up to 256 zones
- Jog Dial with 4 soft buttons for simple and intuitive user control
- Aesthetic pleasing design with special paintable synthetic door
- Easy removable door and chassis for quick and clean installation
- All pluggable connectors
- 3 USB ports with memory stick support and RS232 for printer support
- Email notification for events directly from the panel (4 user accounts)
- Auxiliary 24VDC supply output with reset support
- 3 operator level menu structure (20 usernames and passwords)
- History log memory for 9999 events
- Up to 72 hours standby time and 30 minutes alarm
- Compatible with the new loop powered sounders/beacons and base sounders and the 2000 series detectors with replaceable optical chamber

# 2X-F2-FB2-PRT-32

## Addressable Fire Panel w/ Fire Brigade Controls with Printer- 2 Loop - French Belgian

### Specifiche tecniche

#### Generale

Capacità massima del sistema (conteggio dispositivi) up to 32768

Dimensione Network (nodi) up to 64

#### Elettrico

Tipo di alimentatore VAC

Operating voltage 110/230 VAC (+10%/-15%)  
50 / 60 Hz (±5%)

Consumo attuale Nom. 0.6 / 1.3 A, Max. 1.5 / 3.15 A  
2 / 4 A (fuse rating)

#### Ciclo continuo

Maximum loop capacity 4

Tipo e intervallo Recommended 2 core 1.5 mm<sup>2</sup> twisted pair (cable)

Valutazione cavo 56ohm / 1µF max. 2 km (length)

#### Zona

Capacità massima zone up to 512

#### Ingresso

Tipo di input e intervallo 150 mA (max. load); Recommended 2 core 1.5 mm<sup>2</sup> twisted pair (cable)

Programmabile 2

Termine 15 kohm (EOL resistor)

#### Uscita

Tipo di uscita e intervallo Recommended 2 core 1.5 mm<sup>2</sup> twisted pair (cable)

Segnalazione allarme antincendio 2 x General Fire + Fault relay

Potenza ausiliaria 1 resetable, 500mA / 19.5-28VDC (24VDC nominal)

Programmabile 4, 750mA / 19.5-28VDC (24VDC nominal) (supervised)

Termine 15 kohm (EOL resistor)

#### Standby batteria

Capacity Max. 2 x 12V/18Ah (use supplied cables)

#### Fisico

Fattore di forma Grande

Dimensioni fisiche 450 x 550 x 171 mm (W x H x D)

Peso netto 7.4 kg (without battery)

Peso spedizione 10.1 kg

Colour Grigio (RAL 7035)

Tipo di montaggio Montaggio a superficie

Cavo di entrata 18 (20mm) / 2 (20mm) / 2 removable plates (Top / Bottom / Back)

#### Ambientale

Operating temperature -8 to +42°C

Temperatura di immagazzinamento -10 to +50°C

Umidità relativa 95% max. noncondensing

Ambiente Interno

IP rating IP30: for indoor use only

#### Regolatorio

Conformità BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE

Certificazioni EN54-13, EN54-2, EN54-21, EN54-4, VdS

#### Electrical


Mains supply cable type 3 x 1.5 mm<sup>2</sup> (live, neutral, earth)

#### Output

General Fire + Fault supervised 2, 350mA / 19.5-28VDC (24 VDC nominal)

#### Loop

Outputs 250 mA / 29VDC (29VDC to 36VDC )

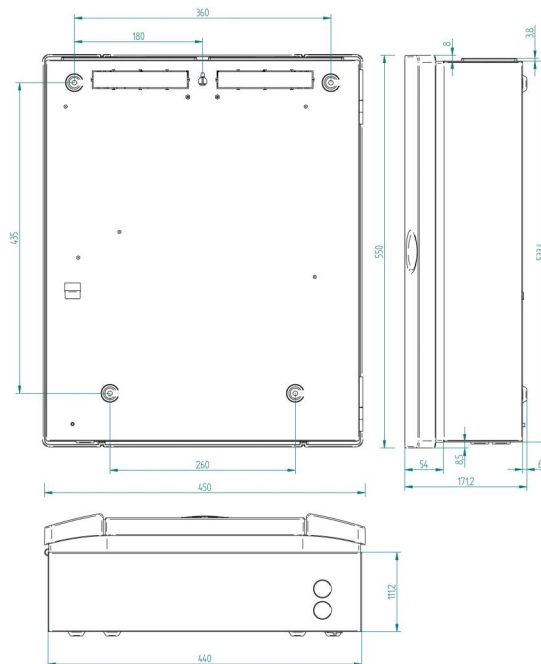

In quanto azienda in continua innovazione, Carrier Fire & Security si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita [it.firesecurityproducts.com](http://it.firesecurityproducts.com) online o contatta il tuo riferimento commerciale.

Last updated on 16 February 2024 - 12:24