

2X-F2-FB2-46

Addressable Fire Panel with User Interface with Fire Brigade Controls - 2 Loop

Overview

The 2X Series life safety control systems are bringing the speed and functionality of high-end intelligent processing to small to mid-sized addressable applications. They feature an attractive contemporary design that fits with any decor. Special plastics allows for painting in any color and the easy to remove electronics will support in this matter. The gently lined door with the intuitive dark inset user interface and EN54 compliant graphical LCD offers a distinctive flair. The main controls are clearly, but discreetly highlighted with the focus on the central located Jog Dial. With the addressable detection and a full line of easily configured option cards and modules, USB and Ethernet® connectivity, these quick-to-configure systems offer versatility that benefits building owners and life safety system installers alike.

The Panel

The fire panels supplied in local language, with user interface with fire routing controls, with 2 loops that supports up to 256 devices in 512 zones, have standard 4 supervised sounder/fire-routing outputs, which can be used as freely programmable outputs as well. In addition 2 conventional relay outputs and 2 supervised outputs, working in pair and dedicated to common fire and fault conditions, as well as 2 user configurable inputs for monitoring and control are available.

Options

The panel supports an extra 2 loop board that brings the panel to up to 512 zones with 4 additional programmable outputs. Add a network board to create a maximum of 32 nodes / 32 loops network of fire panels and fire panel repeaters (including conventional fire panels and fire repeater panels up to a maximum of 64 conventional zones). Last but not least, in case separate zone indications are required, a 20 or a 40 zone fire/ fault LED indicator board can be mounted in the panel or repeater with ample space for custom text.

Approvals & Compliance

- CE / CPD / EN54-2 / EN54-4 / EN54-21
- NEN2535 / NBNS21-100 compliant
- BS5839-1 compliant
- VdS and LPCB certified
- WEEE / RoHS compliant



Details

- 2 loops expandable to 4 with up to 256 zones with Fire Brigade & Fire Protection controls and 300 output groups
- Up to 40 LED Zone indicators for Fire and Fault with ample text space
- Auto configuration, setup wizard and default regional setup modes
- Ethernet port with TCP/IP for remote diagnostics, maintenance and programming
- EN54 compliant graphical LCD with icons and up to 256 zones
- Jog Dial with 4 soft buttons for simple and intuitive user control
- Aesthetic pleasing design with special paintable synthetic door
- Easy removable door and chassis for quick and clean installation
- All pluggable connectors
- 3 USB ports with memory stick support and RS232 for printer support
- Email notification for events directly from the panel (4 user accounts)
- Auxiliary 24VDC supply output with reset support
- 3 operator level menu structure (20 usernames and passwords)
- History log memory for 9999 events
- Up to 72 hours standby time and 30 minutes alarm
- Compatible with the new loop powered sounders/beacons and base sounders and the 2000 series detectors with replaceable optical chamber

2X-F2-FB2-46

Addressable Fire Panel with User Interface with Fire Brigade Controls - 2 Loop

Technische specificaties

Algemeen

Maximale systeemcapaciteit (aantal apparaten) up to 32768

Netwerkgrootte (nodes) up to 64

Elektrisch

Power supply type VAC

Operating voltage 110/230 VAC (+10%/-15%), 50 / 60 Hz ($\pm 5\%$)
Cable type: 3 x 1.5 mm² (live, neutral, earth)

Stroomverbruik Nom. 0.6 / 1.3 A, Max. 1.5 / 3.15 A
2 / 4 A (fuse rating)

Lus

Maximale luscapaciteit 4

Type en classificatie Recommended 2 core 1.5 mm² twisted pair (cable)

Kabelclassificatie 52 ohm, 500 nF, max. 2 km

Zoniert

Maximale zonecapaciteit up to 512

Ingang

Type ingang en classificatie 150 mA (max. load); Recommended 2 core 1.5 mm² twisted pair (cable)

Programmeerbaar 2

Afsluiting 15 kohm (EOL resistor)

Uitgang

Type uitgang en classificatie Recommended 2 core 1.5 mm² twisted pair (cable)

Brandalarm signalering 2 x General Fire + Fault relay

Hulpvoeding 1 resetable, 500 mA / 19.5 to 28 VDC (24 VDC nominal)

Programmeerbaar 4, 750 mA / 19.5 to 28 VDC (24 VDC nominal) (supervised)

Afsluiting 15 kohm (EOL resistor)

Standby accu

Capaciteit Max. 2 x 12 V, 18 Ah (use supplied cables)

Fysiek

Vormfactor Groot

Fysieke afmetingen 450 x 550 x 171 mm (W x H x D)

Netto gewicht 7.4 kg (without battery)

Verzendgewicht 10.1 kg

Kleur Grijs (RAL 7035)

Type montage Oppervlaktemontage

Cable entries 18 (20 mm) / 2 (20 mm) / 2 removable plates (Top / Bottom / Back)

Omgeving

Bedrijfstemperatuur -8 to +42°C

Opslagtemperatuur -10 to +50°C

Relative humidity 95% max. noncondensing

Omgeving Binnen

IP rating IP30: for indoor use only

Regelgeving

Conformiteit BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE


Certificering EN54-13, EN54-2, EN54-21, EN54-4, VdS

Ausgang

General Fire + Fault supervised 2, 350mA / 19.5-28VDC (24 VDC nominal)

Schleife

Outputs 250 mA / 29VDC (29VDC to 36VDC)

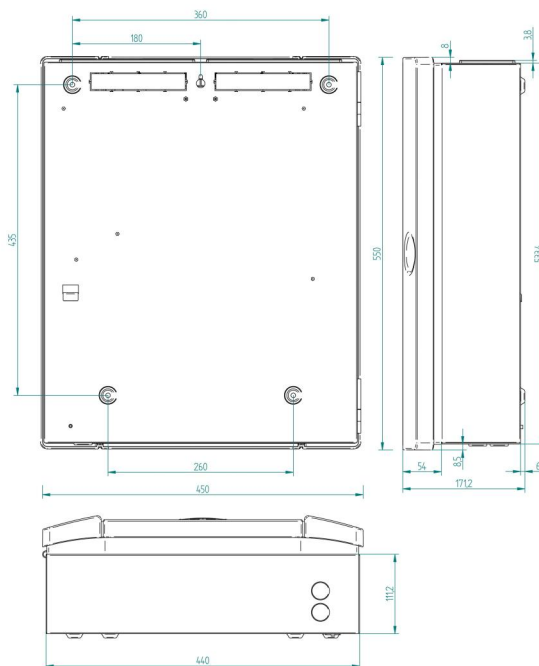

Als een bedrijf van innovatie behoudt Carrier Fire & Security zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 22 March 2024 - 15:49