



# FP2864C-32

## 2000 Series - Addressable Fire Panel with 2 to 8 loops 16 - 64 zones - French Belgian

### General

---

The FP2864C is a versatile addressable fire panel supplied with 2 class-A loops. In addition to a generous backlit LCD display, it provides LEDs for indicating both fire and fault conditions with text descriptions for 16 fire zones on the front panel user interface. The panel may be upgraded with an additional 6 class-A loops as well as 48 zone indicators, full inter-panel networking facilities on both copper or fibre, as well as with a LON network bus that supports the Aritech LON700 devices and repeaters, amongst others.

The FP2864C provides extensive maintenance features, boasts powerful I/O programming and supports both Aritech 2000 and 900 series protocols.

### Installer and User friendly

---

The FP2864C offers multiple auto-configuration options with extensive auto detection facilities facilitating quick initial setup even for large systems. Multiple repeaters in various formats may be connected over a 2-wire network with both class-A and B operating modes, whilst up to 31 fire panels may be networked together for large applications.

In addition to the comprehensive information LEDs, the panel's large LCD display allows for every device in the system to be described with up to 80 characters of descriptive text, as well as 40 characters for zone descriptions. Complete statistics and graphics indications for every device are available.

Several mechanisms for preventing false alarms, including floating background with automatic compensation, double knock and coincidence mode within and between zones, as well as soak test facilities allow the user complete piece of mind.

### Maintenance friendly


---

Maintenance warnings are available whenever detectors reach contamination levels. Together with real time diagnostics and statistics per sensor, the FP2864C offers a wealth of in-depth information locally or by remote connections.

### LON700 Modules

---

Up to 32 LON700 nodes are supported on the optional LON700 network. This includes LCD and LED repeaters, synoptic chart drivers, supervised in- and output boards, relay and open collector output boards, zone monitors and power supplies.

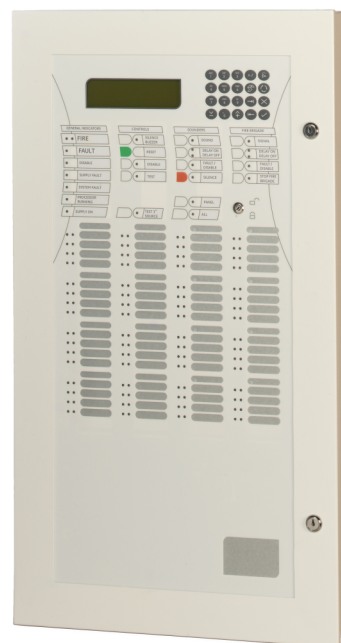

### Details

---

- Configuration, maintenance and graphic PC software support
- Up to 128 device addresses per loop
- Full interpanel network options
- Full range of repeaters and LON700 devices including Dutch and Scandinavian fire brigade panels, and Scandinavian alarm delay units
- Networkable "black box" panels
- Power supply for 72-hour autonomy
- Default start-up and service modes
- Programmable service reminders, on-line diagnostics and statistics
- Maintenance warnings and soak testing facilities
- One-man maintenance
- Floating background and drift compensation
- Programmable day/night functionality
- Coincidence within and between zones
- Timed and manual zone control
- I/O programming with Boolean functions (maximum allocated input memory = 300)
- Scandinavian variants with Scandinavian firemans key available
- EN54 and CPD certified

# FP2864C-32

## 2000 Series - Addressable Fire Panel with 2 to 8 loops 16 - 64 zones - French Belgian

### Especificações técnicas

#### Geral

|  |             |
|--|-------------|
| Capacidade máxima de loop (quantidade de dispositivos) | até 30K     |
| Dimensão de rede (nós)                                 | mais de 128 |

#### Elétrica

|                     |   |
|---------------------|---|
| Consumo de energia  | 200 VA  |
| Tensão de operação  | 230 VAC (+10%, -15%), 47-63 Hz<br>21 to 28 VDC          |
| Consumo de corrente | <240 mA @ 24 VDC (Alarm)<br>200 mA @ 24 VDC (Operating) |

#### Loop

|                           |                            |
|---------------------------|----------------------------|
| Capacidade máxima de loop | 8                          |
| Loops per panel           | 8 (Class A)/8 (Class B)    |
| Loop current              | <500 mA                    |
| Addresses per loop        | <128 (Protocol dependent)  |
| Loop cable length         | <2 km                      |
| Loop cable specification  | Ø 1 mm, 300 nF/km, 100 ohm |

#### Zona

|                            |         |
|----------------------------|---------|
| Capacidade máxima de zonas | até 256 |
|----------------------------|---------|

#### Bateria de standby

|              |   |
|--------------|---|
| Capacidade   | 2 x 12 V, 7 to 45 Ah                        |
| Carregamento | Battery charger: 27.3 VDC at 20°C, 36 mV/°C |

#### Físico

|                   |                                |
|-------------------|--------------------------------|
| Fator de forma    | Grande                         |
| Dimensões físicas | 810 x 445 x 120 mm (H x W x D) |
| Peso líquido      | 15 kg                          |
| Cor               | Branco (RAL 9016)              |
| Tipo de montagem  | Montagem em superfície         |

#### Ambiental

|                              |              |
|------------------------------|--------------|
| Temperatura de operação      | -5 to +40°C  |
| Temperatura de armazenamento | -20 to +60°C |
| Classificação IP             | IP54         |

#### Regulamentação

|              |                |
|--------------|----------------|
| Certificação | EN54-2, EN54-4 |
|--------------|----------------|

#### Electrical

|                           |                           |
|---------------------------|---------------------------|
| Auxiliary supply (24 VDC) | 19 to 28 VDC @ 1 A (max)  |
| Auxiliary supply (5 VDC)  | 5 VDC (±0.1V) 75 mA (max) |

#### Inputs and outputs

|                                 |                                  |
|---------------------------------|----------------------------------|
| Relays                          | 4, 2 A @ 24 VDC, 60 W            |
| Supervised Relays               | 4, 24 VDC, 30 ohm, 120 nF, 500 m |
| Inputs (Opto Isolated)          | 4, 15 VAC/0 to 28 VDC            |
| Inputs (Supervision selectable) | 4                                |
| Zone indicators per panel       | 64 (fire & fault)                |