

# 2X-F2-FB2-46

## Addressable Fire Panel with Fire Brigade Controls - 2 Loop - German

### Overview

The 2X Series life safety control systems are bringing the speed and functionality of high-end intelligent processing to small to mid-sized addressable applications. They feature an attractive contemporary design that fits with any decor. Special plastics allows for painting in any color and the easy to remove electronics will support in this matter. The gently lined door with the intuitive dark inset user interface and EN54 compliant graphical LCD offers a distinctive flair. The main controls are clearly, but discreetly highlighted with the focus on the central located Jog Dial. With the addressable detection and a full line of easily configured option cards and modules, USB and Ethernet® connectivity, these quick-to-configure systems offer versatility that benefits building owners and life safety system installers alike.

### The Panel

The fire panels supplied in local language, with user interface with fire routing controls, with 2 loops that supports up to 256 devices in 512 zones, have standard 4 supervised sounder/fire-routing outputs, which can be used as freely programmable outputs as well. In addition 2 conventional relay outputs and 2 supervised outputs, working in pair and dedicated to common fire and fault conditions, as well as 2 user configurable inputs for monitoring and control are available.

### Options

The panel supports an extra 2 loop board that brings the panel to up to 512 zones with 4 additional programmable outputs. Add a network board to create a maximum of 32 nodes / 32 loops network of fire panels and fire panel repeaters (including conventional fire panels and fire repeater panels up to a maximum of 64 conventional zones). Last but not least, in case separate zone indications are required, a 20 or a 40 zone fire/ fault LED indicator board can be mounted in the panel or repeater with ample space for custom text.

### Approvals & Compliance

- CE / CPD / EN54-2 / EN54-4 / EN54-21
- NEN2535 / NBNS21-100 compliant
- BS5839-1 compliant
- VdS and LPCB certified
- WEEE / RoHS compliant



### Detaljer

- 2 loops expandable to 4 with up to 512 zones with Fire Brigade & Fire Protection controls and 300 output groups
- Up to 40 LED Zone indicators for Fire and Fault with ample text space
- Auto configuration, setup wizard and default regional setup modes
- Ethernet port with TCP/IP for remote diagnostics, maintenance and programming
- EN54 compliant graphical LCD with icons and up to 256 zones
- Jog Dial with 4 soft buttons for simple and intuitive user control
- Aesthetic pleasing design with special paintable synthetic door
- Easy removable door and chassis for quick and clean installation
- All pluggable connectors
- 3 USB ports with memory stick support and RS232 for printer support
- Email notification for events directly from the panel (4 user accounts)
- Auxiliary 24VDC supply output with reset support
- 3 operator level menu structure (20 usernames and passwords)
- History log memory for 9999 events
- Up to 72 hours standby time and 30 minutes alarm
- Compatible with the new loop powered sounders/beacons and base sounders and the 2000 series detectors with replaceable optical chamber

# 2X-F2-FB2-46

## Addressable Fire Panel with Fire Brigade Controls - 2 Loop - German

### Tekniska specifikationer

#### Allmänt

Maximal up to 32768

systemkapacitet (antal enheter)

Nätverksstorlek (noder) up to 64

#### Elektrisk

Strömförsörjningstyp VAC

Driftspänning 110/230 VAC (+10%/-15%), 50 / 60 Hz (±5%)  
Cable type: 3 x 1.5 mm<sup>2</sup> (live, neutral, earth)

Nuvarande förbrukning Nom. 0.6 / 1.3 A, Max. 1.5 / 3.15 A  
2 / 4 A (fuse rating)

#### Slinga

Maximal slingkapacitet 4

Typ och betyg Recommended 2 core 1.5 mm<sup>2</sup> twisted pair (cable)

Kabelbetyg 52 ohm, 500 nF, max. 2 km

#### Zon

Maximal zonkapacitet up to 512

#### Ingång

Ingångstyp och betyg 150 mA (max. load); Recommended 2 core 1.5 mm<sup>2</sup> twisted pair (cable)

Programmerbar 2

Uppsägning 15 kohm (EOL resistor)

#### Utgång

Utgångstyp och klassificering Recommended 2 core 1.5 mm<sup>2</sup> twisted pair (cable)

Brandlarmssignalering 2 x General Fire + Fault relay

Hjälpkraft 1 resetable, 500 mA / 19.5 to 28 VDC (24 VDC nominal)

Programmerbar 4, 750 mA / 19.5 to 28 VDC (24 VDC nominal) (supervised)

Uppsägning 15 kohm (EOL resistor)

#### Standby-batteri

Kapacitet Max. 2 x 12 V, 18 Ah (use supplied cables)

#### Fysisk

Formfaktor Stor

Fysiska dimensioner 450 x 550 x 171 mm (W x H x D)

Nettovikt 7.4 kg (without battery)

Fraktvikt 10.1 kg

Färg Grå (RAL 7035)

Monteringstyp Ytmontering

Kabelinmatningar 18 (20 mm) / 2 (20 mm) / 2 removable plates (Top / Bottom / Back)

#### Miljö

Driftstemperatur -8 to +42°C

Lagringstemperatur -10 to +50°C

Relativ luftfuktighet 95% max. noncondensing

Miljö Inomhus

IP-betyg IP30: for indoor use only

#### Reglerande

Undfallenhet BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE


Intygande EN54-13, EN54-2, EN54-21, EN54-4, VdS

#### Ausgang

General Fire + Fault 2, 350mA / 19.5-28VDC (24 VDC nominal) supervised

#### Schleife

Outputs 250 mA / 29VDC (29VDC to 36VDC )

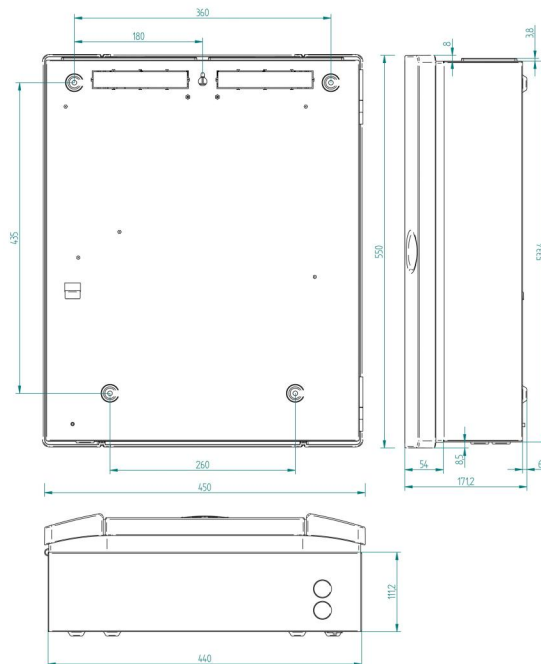

Carrier Fire & Security förbehåller sig rätten att ändra produktspecifikationer utan föregående meddelande. För de senaste produktspecifikationerna, besök [se.firesecurityproducts.com](http://se.firesecurityproducts.com) online eller kontakta din försäljningsrepresentant.

Last updated on 22 March 2024 - 15:49