

# KFP-AF1-S-10

## Addressable Fire Panel - 1 Loop small cabinet - Italian

### Overview

The KFP-A Series life safety control systems are bringing the speed and functionality of high-end intelligent processing to small to mid-sized addressable applications. They feature an attractive contemporary design that fits with any decor. Special plastics allows for painting in any color and the easy to remove electronics will support in this matter. The gently curved door with the intuitive dark inset user interface and EN54 compliant graphical LCD offers a distinctive flair. The main controls are clearly, but discreetly highlighted with the focus on the central located Jog Dial.

With the addressable detection and a full line of easily configured option cards and modules, USB and Ethernet® connectivity, these quick-to-configure systems offer versatility that benefits building owners and life safety system installers alike.

### The Panel

The fire panels supplied in local language, with user interface, with 1 loop that supports up to 250 devices in 512 zones, have standard 2 supervised sounder/fire-routing outputs, which can be used as freely programmable outputs as well. In addition 2 conventional relay outputs and 2 supervised outputs, working in pair and dedicated to common fire and fault conditions, as well as 2 user configurable inputs for monitoring and control are available.

### Options

The panels supports one network board to create a maximum of 32 nodes / 32 loops network of fire panels, fire panel repeaters (including conventional fire panels and fire panel repeaters up to a maximum of 64 conventional zones). Last but not least, in case separate zone indications are required, a 24 zone fire/fault LED indicator board can be mounted in the panel or repeater with space for a 4 digit number.

### Approvals & Compliance

- CE / CPD / EN54-2 / EN54-4
- NEN2535 / NBNS21-100 compliant
- BS5839-1 compliant
- VdS and LPCB certified
- WEEE / RoHS compliant



### Detaljer

- 1 loop with up to 512 zones and 300 output groups
- Up to 24 LED Zone indicators for Fire and Fault with space for a 4 digit number
- Auto configuration and default regional setup modes
- Ethernet port with TCP/IP for remote maintenance and programming
- EN54 compliant graphical LCD with icons and up to 256 zones
- Jog Dial with 4 soft buttons for simple and intuitive user control
- Aesthetic pleasing design with special paintable synthetic door
- Easy removable door and chassis for quick and clean installation
- All pluggable connectors
- 3 USB ports with memory stick support and RS232 for printer support
- Email notification for events directly from the panel (4 user accounts)
- Auxiliary 24VDC supply output with reset support
- 3 operator level menu structure (20 user names and passwords)
- History log memory for 9999 events
- Up to 24 hours standby time and 30 minutes alarm
- Compatible with the KL700A series detectors with replaceable optical chamber and loop powered sounders and base sounders

# KFP-AF1-S-10

## Addressable Fire Panel - 1 Loop small cabinet - Italian

### Tekniske specifikationer

#### Generelt

Maksimal systemkapacitet (antal enheder) up to 16000

Netværksstørrelse (noder) up to 64

#### Elektrisk

Strømforsyningstype VAC

Driftsspænding 110 / 230 VAC (+10% / -15%)

Nuværende forbrug Nom. 0.6 / 1.3 A, Max. 1.5 / 3.15 A

#### Sløjfe

Maksimal sløjfekapacitet 1

#### Zona

Maksimal zonkapacitet up to 512

#### Standby batteri

Kapacitet Max. 2 x 12 V, 7.2 Ah (use supplied cables)

#### Fysisk

Form faktor Lille

Fysiske dimensioner 410 x 298 x 162 mm (W x H x D)

Nettovægt 5.2 kg (without battery)

Forsendelsesvægt 6.6 kg

Farve Ren hvid (RAL 9010)

Monteringstype Overflademontering

Kabelindgange 9 (20 mm) / 2 (20 mm) / 2 removable plates (Top /Bottom/Back)

#### Miljø

Driftstemperatur -5 to +40°C

Stuetemperatur -10 to +50°C

Relativ luftfugtighed 95% max. noncondensing

Miljø Indendør

IP-vurdering IP30: for indoor use only

#### Regulerende

Overholdelse BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE

Certificatie EN54-13, EN54-2, EN54-21, EN54-4, VdS

#### Mains supply

Frequency 50 / 60 Hz (±5%)

Fuse rating 2 / 4 A

Cable type 3 x 1.5 mm<sup>2</sup> (live, neutral, earth)

#### Uscite

Programmable supervised 2, 750mA / 19.5-28VDC (24VDC nominal)

General Fire + Fault supervised 2, 350mA / 19.5-28VDC (24 VDC nominal)

General Fire + Fault relay 2

Aux 1 resetable, 500mA / 19.5-28VDC (24VDC nominal)

Cable type Recommended 2 core 1.5 mm<sup>2</sup> twisted pair

End of Line resistor 15kohm

#### Ingressi

Programmable 2

Cable type Recommended 2 core 1.5 mm<sup>2</sup> twisted pair

End of Line resistor 15kohm


Maximum Load 150 mA

#### Loops

Outputs 1, 250 mA / 29VDC (29VDC to 36VDC )

Cable length 52ohm / 500nF max. 2 km

Cable type Recommended 2 core 1.5 mm<sup>2</sup> twisted pair

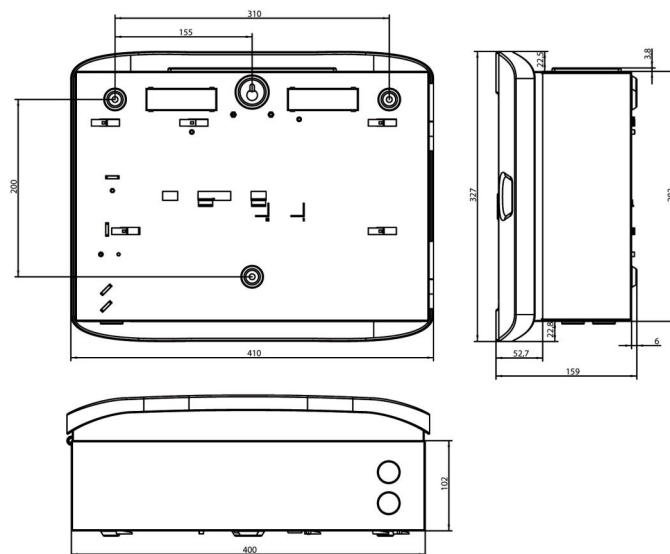

Carrier Fire & Security er et innovativt selskab og forbeholder sig ret til at ændre produktspecifikationer uden varsel. De nyeste produktspecifikationer kan du finde på [dk.firesecurityproducts.com](http://dk.firesecurityproducts.com) eller ved at kontakte din salgsrepræsentant hos.

Last updated on 15 February 2024 - 10:59