

2X-FR-FB2-32

Addressable Fire Panel Repeater with Fire Brigade controls - French Belgian

Overview

The 2X Series life safety control systems are bringing the speed and functionality of high-end intelligent processing to small to mid-sized addressable applications. They feature an attractive contemporary design that fits with any decor. Special plastics allows for painting in any color and the easy to remove electronics will support in this matter. The gently lined door with the intuitive blue inset user interface and EN54 compliant graphical LCD offers a distinctive flair. The main controls are clearly, but discreetly highlighted with the focus on the central located Jog Dial. With the addressable detection and a full line of easily configured option cards and modules, USB and Ethernet® connectivity, these quick-to-configure systems offer versatility that benefits building owners and life safety system installers alike.

The Panel

The fire panel repeaters, with user interface with fire brigade and fire protection controls, supplied in local language come with a 2010-2-NB network board already fitted. Except for having no addressable loops and corresponding programmable outputs, the setup is similar as a normal fire panel. It and has its own power supply, 2 conventional relay outputs and 2 supervised outputs, working in pair and dedicated to common fire and fault conditions, as well as 2 user configurable inputs for monitoring and control are available.

Options

The repeaters use a node on the network, similar like a normal panel with a maximum of 32 nodes / 32 loops network of fire panels and fire panel repeaters (including conventional fire panels and fire panel repeaters up to a maximum of 64 conventional zones). Last but not least, in case separate zone indications are required, a 20 or 40 zone fire/fault LED indicator board can be mounted in the panel or repeater with ample space for text.

Approvals & Compliance

- CE / CPD / EN54-2 / EN54-4 / EN54-21
- NEN2535 / NBNS21-100 compliant
- BS5839-1 compliant
- VdS and LPCB certified
- WEEE / RoHS compliant



Einzelheiten

- Local or global repeater with Fire Brigade and Fire Protection controls with or without global control functionality
- Up to 40 LED Zone indicators for Fire and Fault with ample text space
- Auto configuration, setup wizards and default EN54 setup modes
- Ethernet port with TCP/IP for remote diagnostics, maintenance and programming
- EN54 compliant graphical LCD with icons and up to 256 zones
- Jog Dial with 4 soft buttons for simple and intuitive user control
- Aesthetic pleasing design with special paintable synthetic door
- Easy removable door and chassis for quick and clean installation
- All pluggable connectors
- 3 USB ports with memory stick support and RS232 for printer support
- Email notification for events directly from the panel (4 user accounts)
- Auxiliary 24VDC supply output with reset support
- 3 operator level menu structure (20 usernames and passwords)
- History log memory for 9999 events
- Up to 72 hours standby time and 30 minutes alarm
- Comes standard fitted with network board

2X-FR-FB2-32

Addressable Fire Panel Repeater with Fire Brigade controls - French Belgian

Technische Spezifikationen

Allgemein

Netzwerkgröße (Knoten) bis zu 64

Elektrische Angaben

Netzteil	VAC
Betriebsspannung	110/230 VAC (+10%/-15%), 50 / 60 Hz ($\pm 5\%$) Cable type: 3 x 1.5 mm ² (live, neutral, earth)
Aktueller Verbrauch	Nom. 0.6 / 1.3 A, Max. 1.5 / 3.15 A 2 / 4 A (Fuse rating)

Eingang

Eingangstyp und Klasse 150 mA (max. load), Cable type: Recommended 2 core 1.5 mm² twisted pair

Programmierbar	2
Beenden	15 kohm

Ausgang

Ausgabetyp und -Klasse Cable type: Recommended 2 core 1.5 mm² twisted pair

Abschluss	15 kohm
-----------	---------

Standby Batterie

Kapazität Max. 2 x 12 V, 18 Ah (use supplied cables)

Physikalisch

Formfaktor	Groß
Abmessungen	450 x 550 x 171 mm (W x H x D)
Nettogewicht	7.4 kg (without battery)
Liefergewicht	10.1 kg
Farbe	Grau (RAL 7035)
Montage	Oberflächenmontage
Kabeleinführungen	18 (20 mm) / 2 (20 mm) / 2 removable plates (Top / Bottom / Back)

Umweltbedingungen

Betriebstemperatur -5 to +40°C

Lagertemperatur -10 to +50°C

Relative Luftfeuchtigkeit 95% max. noncondensing

Umgebung Drinnen

IP Klassifizierung IP30: for indoor use only

Regulativ

Kompatibilität BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE


Zertifizierung EN54-2, EN54-21, EN54-4, VdS

Output

General Fire + Fault 2, 350 mA, 19.5 to 28 VDC (24 VDC nominal)
supervised

General Fire + Fault 2
relay

Aux 1 resetable, 500 mA, 19.5 to 28 VDC (24 VDC nominal)

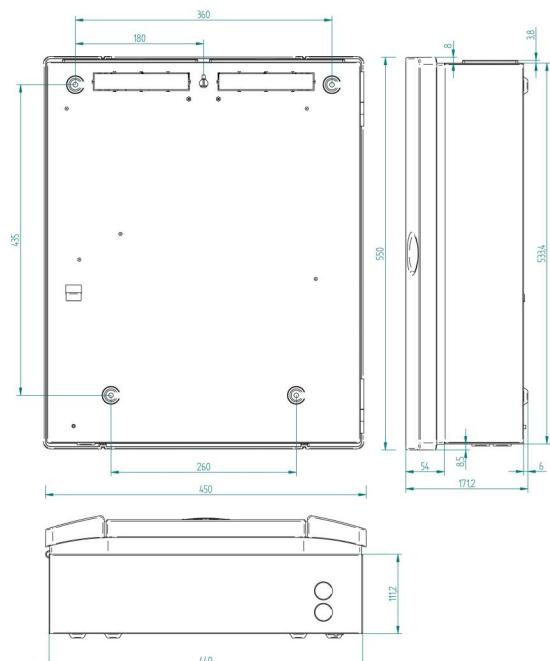

Als innovatives Unternehmen behält sich Kidde Global Solutions das Recht vor, Produktspezifikationen ohne Ankündigungen zu ändern. Für die aktuellsten Produktspezifikationen, besuchen Sie bitte de.firesecurityproducts.com online oder kontaktieren Sie bitte unsere Vertriebsmitarbeiter.