
DF432

ultraLink 32 relay output expansion module. DIN-rail mount

The I/O module (DF400) can be expanded with a 32 relay outputs card (DF432). Up to 8 expansion modules can be atatched to one processor module.

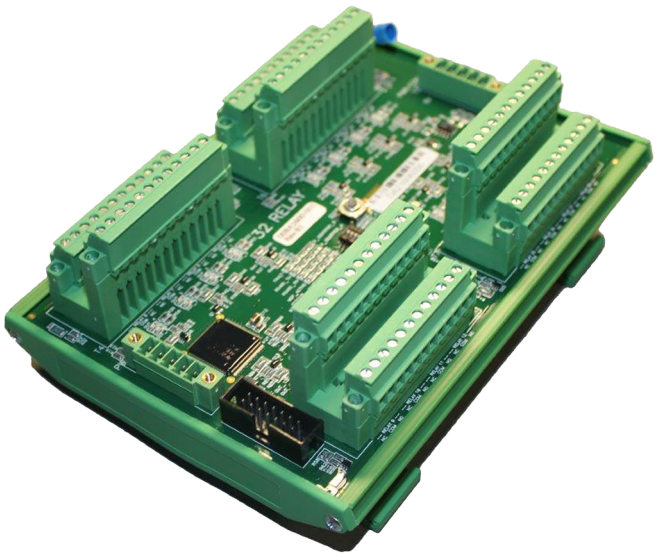

Details

- 32 relay outputs
- Configurable for activation type and timing
- Activation type: latching, flash mode, pulse
- Hold/activation times programmable from 0.125 to 10 seconds

DF432

ultraLink 32 relay output expansion module. DIN-rail mount

Technical specifications

General

Category	FlexZone
Product type	FlexZone Control unit

Inputs / outputs

	LED indicators
Relay outputs	32
Relay - Form C	1A, 30 VDC

Electrical

Operating voltage	30 VDC
Current consumption	1 A

Environmental

Environment	Indoor

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 30 April 2024 - 11:05