

SC-41-0200-0001-99


SmartCell Dual Input/Output Device for Fire Zones

Overview

The SmartCell Input / Output Device is quick and easy to install and offers individual addressing at the SmartCell Control Panel.

Features include two resistor monitored inputs, two voltage free outputs and bidirectional 868 MHz communication.

This device is third party certified and compatible with the full SmartCell product range.

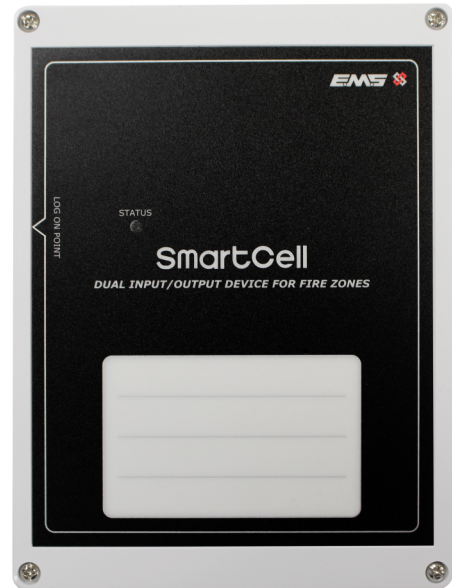

Details

- Full wireless communication with panel
- Quick and easy to install
- Two resistor monitored inputs
- Two voltage free outputs
- For connection to remote fire devices

SC-41-0200-0001-99

SmartCell Dual Input/Output Device for Fire Zones

Technical specifications

General

Wireless frequency 868 MHz

Input

Input quantity 2

Input type and rating Resistor monitored inputs

Output

Output quantity 2

Output type and rating Voltage free outputs, rated 1 A at 30 VDC

Physical

Physical dimensions 150 x 200 x 55 mm (W x H x D)

Net weight 0.45 kg

Mounting type Wall mount

Batteries 3 x ER14505M 3.6 V lithium thionyl chloride batteries (Fanso or Titus)

Environmental

Operating temperature -10 to +55°C

Storage temperature -10 to +30°C (with batteries)
-10 to +55°C (without batteries)

Relative humidity 95% noncondensing max.

Environment Indoor

Regulatory

Compliance CE

Certification CPR

Standards EN54-13
EN54-18
EN54-25



As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 8 August 2024 - 14:32