

Remote control



- Arm/Disarm
- Activate outputs
- Open doors
- Create user code



CMS - Remote monitoring



ultraSync Empowered

VPN
OH
AES encryption

VPN

VPN

IP

RS485

Secure channel

BUS

Everon Panels

ATS1700
48 zones

ATS3700
256 zones

ATS4700
1008 zones

API Integration



Removal of doubt



PIRcam
TX-2344-03-1-N



Radio receiver
ATS1238

Keypads



ATS110A-N ATS1136 ATS1125 ATS1125-B ATS1140 - Clavier tactile
ATS115A-N ATS1135

Readers



ATS1180 ATS1181 MIFARE DESfire Hitag2 ATS1182 ATS1184 ATS1190 ATS1192 ATS1197
ATS1180M ATS1181M

ARCS-W33-B/BT1-70S1
Keypad Architect®
Bluetooth® & RFID OSDP™
Mifare Desfire EV1/EV2/
EV3, CSN & Bluetooth


ARCS-W33-A/BT1-70S1
Reader Architect® Blue
Bluetooth® & RFID OSDP™
Mifare Desfire EV1/EV2/
EV3, CSN & Bluetooth

ARCS-W33-AQ/BT1-70S1
Architect® Blue QR Code,
Bluetooth® & RFID OSDP™
Mifare Desfire EV1/EV2/
EV3, CSN & Bluetooth

ARCIS-W33-B/BT1-70S1
Reader Etroit Architect®
One Blue & RFID OSDP™
Mifare Desfire EV1/EV2/
EV3 CSN & Bluetooth



Cards and Transponders

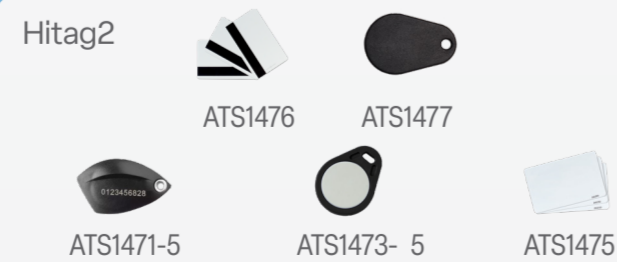

Hitag2
ATS1476 ATS1477
ATS1471-5 ATS1473- 5 ATS1475

MIFARE DESfire EV1/EV2




ATS1451 ATS1452 ATS1453 ATS1455 ATS1458
ATS1459 ATS1460

Interface Wiegand




ATS1170

4G Communication module

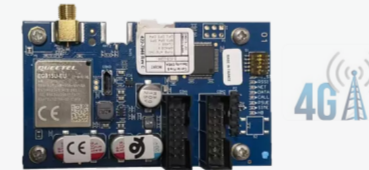

ATS7341 ATS7341-SIM

Input and Output expanders - Plug-In

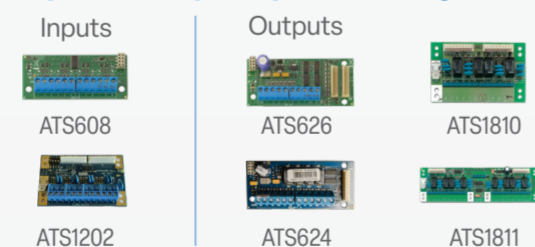

Inputs Outputs
ATS608 ATS626 ATS1810
ATS1202 ATS624 ATS1811

Data bus interfaces



ATS1740 ATS1743
ATS1744 ATS1745

Data bus expanders



ATS1201E ATS1204E ATS1210E ATS1210LE ATS1211E


Data bus wireless receivers



ATS1235 ATS1236 ATS1238

Multi site / multi panel management

Advisor Management Software



Intrusion


- Alarm verification
- Dynamic floor plans
- Multiple sites

Fire

- Vérification d'alarme
- Alarme incendie localisée sur plans d'étage
- Contrôle des portes

Video

- Alarm verification
- Video evidence
- Intelligent image search




Access

- Door and lift control
- Visitor rights/users
- ID management

Advisor Configurator ATS85x0

- Remote maintenance software
- Detailed reporting
- Automated tasks
- Command and control

Single panel management



Web application for the end user


- No software required
- User management
- System status
- Via LAN connection

Installer web app

- No software required
- Via UltraSync Cloud and LAN connection

Mobile apps

Download the Advisor Advanced Pro and TVRMobile App:



Advisor Advanced Pro App

- Intrusion, access and video
- Remote control
- Push notifications
- Video verification



Technical information only - Video

- LAN communication between control unit and recorder Example: intrusion deactivated = recording stopped




Door controller




CDC4-EN / CDC4
Door controller/ lift

- 4 doors per controller (standard mode)
- End-to-end AES encryption between reader, door controller and control unit
- Secure card technology with MIFARE DESFire EV1/EV2
- Aperio wireless locks
Salto wireless locks
- OSDP - OSDP v2 - SSCP




Standard mode

Doors	4
Users	65.532
Door groups	128
History	10.000
Time zones	24
Sub time zones	4
Holidays	8
Floors	64

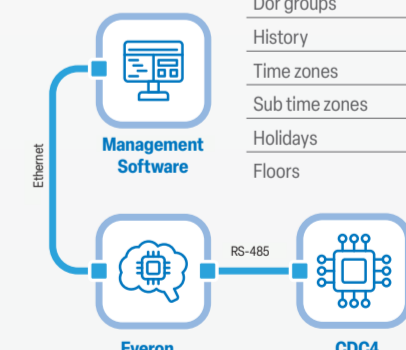

Keypads and readers	
Model	Description
ATS110A-N	Everon, Advisor Advanced keypad 2x16 characters LCD
ATS115A-N	Everon, Advisor Advanced keypad 2x16 characters LCD with integrated card reader
ATS1125	Keypad with card reader MIFARE DESFire EV1/EV2 - White
ATS1125-B	Keypad with card reader MIFARE DESFire EV1/EV2 - Black
ATS1135	Advisor Advanced residential keypad, with integrate card reader HITAG2
ATS1136	Advisor Advanced Secure Mifare keypad with card reader Secure MIFARE DESFire EV1/EV2
ATS1140	7" touchscreen for Axon and Advisor Advancedwith integrate reader Mifare Secure
ATS1170	Wiegand reader interface RAS (single door controller)
ATS1180	Secure MIFARE DESFire EV1/EV2 card reader with output and RTE input in slim design
ATS1181	Lecteur de cartes de proximité Secure Mifare DesFire EV1 / EV2 avec PIN, sortie et entrée RTE au design mince.
ATS1182	Secure MIFARE DESFire EV1/EV2 card reader with output and RTE input in standard design
ATS1184	Secure Mifare DesFire EV1/EV2 card reader with PIN, output and RTE input in standard design
ATS1180M	Secure MIFARE DESFire EV1/EV2/EV3 card reader with output and RTE input in slim design, prepared for Mobile solutions
ATS1181M	Secure MIFARE DESFire EV1/EV2/EV3 card reader with PIN, output and RTE input in slim design, prepared for Mobile solutions
ATS1190	Smart card reader with 2.5 m cable
ATS1192	Heavy-duty Smart card reader with 2.5 m cable
ATS1197	Smart card reader with keypad supplied with 2 m cable
ATS1451	(5 PACK) Secure ATS Sail Keyfob - MIFARE DESFire EV1/EV2
ATS1452	(5 PACK) Secure ATS Clamshell card - MIFARE DESFire EV1/EV2
ATS1453	(5 PACK) Secure Keyfob Round - MIFARE DESFire EV1/EV2
ATS1455	(10 PACK) Secure ATS PVC Card - MIFARE DESFire EV1/EV2
ATS1457	(10 PACK) Secure ATS Pear Keyfob - MIFARE DESFire EV1/EV2
ATS1458 (B/W)	(5 PACK) Secure ATS sBand Black/White - MIFARE DESFire EV1/EV2
ATS1459	(5 PACK) Secure ATS Ultra Keyfob - MIFARE DESFire EV1/EV2
ATS1460	(10 pack)Secure ATS tamper proof sticker - MIFARE DESFire EV1/EV2
ATS1471-5	(5 pack) KeyFob Hitag II
ATS1473-5	(5 pack) Proximity keyfob HITAG II, Black
ATS1475	(10 pack) Proximity card HITAG II - White
ATS1476	(10 pack) Hitag II card with magstripe
ATS1477	(10 pack) High quality fibertag,HITAG II, Black
ATS1495	(10-pack) CARD ISO Secure MF+HT2
ATS1497	(10-pack) Keyfob secure MF+HT2

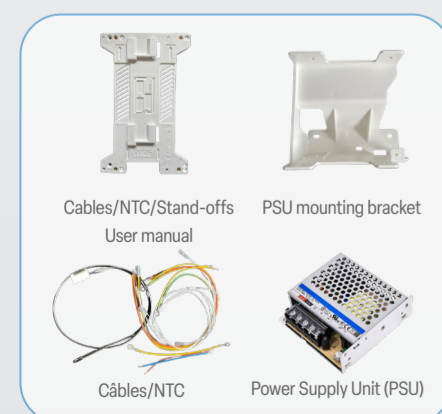

ATSx700-RETRO

Everon Adapter Kit

- Upgrade from Advisor Master or Advisor Advanced to Everon while keeping the original case.
- For use with ATSx700-MBC

Expanders and accessories	
Model	Description
ATS1201E	8 to 32 zones DGP input expander, 3 A power supply, medium metal housing, EN Grade 3 Class II
ATS1204E	8-32 zones DGP input expander, 3 A power supply, large metal housing, EN Grade 3 Class II
ATS1202	8 input expander for ATS120x(E)
ATS1210E	8-16 zone DGP input expander, small plastic housing, EN50131 Grade 3 Class II
ATS1210LE	8 to 16 zone DGP input expander, large plastic housing, EN50131 Grade 3 Class II
ATS1211E	8 -16 zones DGP expander, no PSU, Metal housing, EN50131 Grade 3 Class II
ATS1235	16 to 32 zones Gen2 868AM wireless receiver including plastic housing
ATS1236	32 zones 433 MHz wireless receiver DGP
ATS1238	32 zones Gen2 868AM and PIRcam wireless receiver DGP
ATS1340	ATS door junction box
ATS1740	RS485 databus isolator/repeater
ATS1743	RS485 Databus to Multimode Optical Fiber interface
ATS1744	RS485 4-way databus isolator
ATS1745	RS485 databus to IP-LAN interface: connects two ATS-bus (RS485) devices via local IP network
ATS1810	Relay board, 4-way
ATS1811	Relay board, 8-way
ATS1870	ATS card learn reader (USB) for Hitag2 and Mifare CSN
ATS PROGRAMMER	ATS secure card programmer for use with ATS8600 / C4 (USB)
ATS608	Plug-in input expander, 8-way
ATS624	Plug-in output expander, 4 relay
ATS626	Plug-in output expander, 16-way
ATS7072	Remote ATS1238 expander kit + housing
ATS7341	Cellular module for Everon and Advisor Advanced panels
ATS7341-SIM	Cellular module for Everon and Advisor Advanced panels, including UltraSync SIM card
CDC4	Intelligent 4-8 door / lift controller with 12 V PSU
CDC4-EN	Intelligent 4-8 door / lift controller with 12 V PSU, EN50131 approved, 4 Wiegand inputs
ATSx700-RETRO	Retrofit kit for Everon

Software	
Model	Description
ATS8500-2	Downloader autonome pour Everon et Advisor Advanced - version USB.
ATS8520-2	Logiciel de gestion utilisateurs. - Version USB - Max. 20 centrales.
ATS8550-2	Advisor Configurator - Solution de service à distance multi-clients (logiciel uniquement) - Version USB.
ATS8551	Version de base, licence unique - 250 centrale dans la base de données, 5 Clients.
ATS8552	Version intermédiaire, licence unique - 1500 centrales dans la base de données, 20 Clients.
ATS8553	Version Advanced, licence unique - 10000 centrales dans la base de données, 1000 Clients.
ATS8554	Version entreprise,licence unique-nombre de centrale limité par la base de données SQL, 1000 Clients.
ATS8600	Logiciel de gestion Advisor Edition Starter max 2 systèmes incendie, 2 systèmes vidéo, 2 systèmes d'intrusion/accès.
ATS8610	Logiciel de gestion Advisor Business edition max 25 systèmes incendie, 25 systèmes vidéo, 25 systèmes d'intrusion/accès.

Specifications	Everon ATSx700 platform		
	ATS1700	ATS3700	ATS4700
Approval/Grade - EN50131	EN3	EN3	EN3
Number of onboard inputs	8	16	16
Inputs via plug-in expander on panel PCB	8	8	8
Outputs via plug-in expander on panel PCB	16	16	16
Max. inputs (wired and/or wireless)	48	256	1008
ATS1202 plug-in on panel	3	3	3
Number of onboard outputs	3 signal + 1 relais	3 signal + 2 relais	3 signal + 4 relais
ATS1810 / ATS1811 on panel	2 / 4	2 / 4	2 / 4
Max. number of outputs	128	128	128
Areas	4	8	64
User PIN codes/cards	2000	2000	2000
Users with connected CDC4(-EN)	65532	65532	100k
User groups	256	256	256
Intrusion event logs	14500	14500	14500
Access event logs	10 000	20000	20000
Max. keypads/readers	8	16	32
Max. DGP modules on data bus	7	15	30
Standard doors	4	8	16
CDC4 Standard mode doors/lifts	28	48	48
Regions	255	255	255
Door groups Standard mode	128	128	128

868MHz Gen2 radio	
Model	Description
ATS1235	16 to 32 zones Gen2 868AM wireless receiver including plastic housing
TX-5011-03-1	Shock sensor 868 MHz Gen2, white
TX-2413-03-1	Wireless Dual Technology 12m 868AM Gen2
TX-2810-03-4	Wireless Outdoor PIR 868 AM Gen2
TX-6010-03-1	Wireless smoke/heat detector, 868AM Gen2

433MHz radio	
Model	Description
ATS1236	32 zones 433 MHz wireless receiver DGP
RF903I4	Acoustic glassbreak Detector RF433 MHz
RF581I4	Wireless smoke/heat detector, legacy 433 MHz, 63 bit
RF360I4	Water-resistant medical pendant RF433 MHz
RF-DD1012-K4	Wireless dual technology motion sensor, 12m LoNa

Radio Repeater	
Model	Description
RF-9011-07-1	Wireless repeater 433 MHz

Aritech provides leading security and life-safety solutions for applications covering intrusion, video, transmission and access.

Specifications are subject to change without notice.
© 2025 Aritech. All rights reserved.
Ref. 0225_EN

