2X-AT-FR-FB-S

Addressable fire panel repeater w touchscreen and Fire Brigade controls, small cabinet

Overview

The new 2X-A series life safety control systems bring the speed and functionality of high-end intelligent processing to small to mid-sized addressable applications. Based on 2X series learned experience and with complete backwards compatibility, the new 2X-A features an attractive contemporary design that fits with any decor. With improved robustness, manufactured in metal, special plastics and easy electronics removal, it allows painting in any colour. The main controls are easily located using an improved and robust jog dial.

With high power loop addressable detection, a full line of easily configured option cards and modules, as well as USB and Ethernet® connectivity, these quick-to configure systems offer versatility that benefits building owners and life safety system installers alike.

This version of 2X-A panels includes a 7 inches touchscreen improving the user experience thanks to the more intuitive user interface.

The Panel

The fire panel repeaters, with user interface with fire brigade and fire protection controls, supplied in local language come with a 2010-2-NB network board already fitted. Except for having no addressable loops and corresponding programmable outputs, the setup is similar as a normal fire panel. It and has its own power supply, 2 conventional relay outputs and 2 supervised outputs, working in pair and dedicated to common fire and fault conditions, as well as 2 user configurable inputs for monitoring and control are available.


Options

The repeaters use a node on the network, similar like a normal panel with a maximum of 32 nodes / 32 loops network of fire panels and fire panel repeaters (including conventional fire panels and fire panel repeaters up to a maximum of 64 conventional zones). Last but not least, in case seperate zone indications are required, a 20 or 40 zone fire/fault LED indicator board can be mounted in the panel or repeater with ample space for text.

Network compatible with existing panels, repeaters (existing and new) and conventional panels.

Approvals & compliance

• CE / CPD / EN54-2 / EN54-4 / EN54-21
• WEEE / RoHS compliant

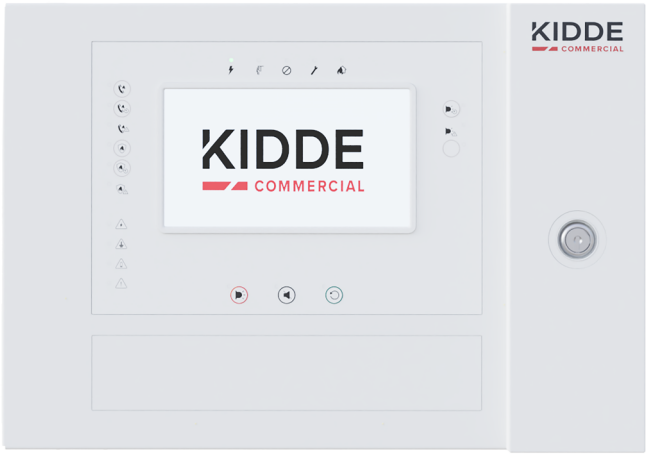

Détails

- Local or global repeater with Fire Brigade and Fire Protection controls with or without global control functionality
- 7" touchscreen
- Up to 24 LED Zone indicators for Fire and Fault with space for a 4 digit number
- Auto configuration, setup wizards and default regional setup modes
- Ethernet port with TCP/IP for remote diagnostics, maintenance and programming
- EN54 compliant graphical LCD with icons and up to 256 zones
- Improved Jog Dial with 4 soft buttons for simple and intuitive user control
- Aesthetic pleasing design with robust painted steel door
- Easy removable door and chassis for quick and clean installation
- All pluggable connectors
- Up to 72 hours standby time and 30 minutes alarm
- 3 USB ports with memory stick support and RS232 for printer support
- 3 operator level menu structure (20 usernames and passwords)
- Email notification for events directly from the panel (4 user accounts)
- History log memory for 9999 events
- Backwards compatible, supporting site retrofit/upgrades, expansions, replacement
- Comes standard fitted with network board

2X-AT-FR-FB-S

Addressable fire panel repeater w touchscreen and Fire Brigade controls, small cabinet

Spécifications techniques

Général

Interface utilisateur	Avec contrôle des pompiers
Taille du réseau (nœuds)	Jusqu'à 64

Électrique

Type de bloc d’alimentation	VAC
Tension de fonctionnement	110 / 240 VAC (+10%/-15%), 50 / 60 Hz (±5%) Cable type: 3 x 1.5 mm² (live, neutral, earth)
Consommation de courant	Nom. 0.6 / 1.3 A, Max. 1.5 A / 3.15 A Fuse rating: 2 / 4 A

Entrée

Quantité entrée	2
Type d'entrée et classe	150 mA (max. Load), Cable type: Recommended 2 core 1.5 mm² twisted pair
Programmable	2
Résiliation	15 kohm

Sortie

Type de sortie et classe	Cable type: Recommended 2 core 1.5 mm² twisted pair
Alimentation auxiliaire	1 resetable, 500 mA, 19.5 to 28 VDC (24 VDC nominal)
Résiliation	15 kohm

Batterie de secours

Capacité	Max. 2 x 12 V / 18 Ah
En charge	27.3 V at 20ºC ; 36 mV/ºC
Seuil d'avertissement de batterie faible	23.6 VDC ± 1% at 25ºC
Batteries supportées dans le boîtier	Max. 2 x 12 V / 7.2 Ah

Caractéristiques physiques

Types de format	Large
Dimensions physiques	446 x 536 x 164 mm (W x H x D)
Poids net	7.4 kg (without battery)
Poids à l'expédition	10.1 kg
Couleur	Blanc (RAL 9003)
Type de montage	Montage en surface
Entrées de câble	18 (20 mm) / 2 (20 mm) / 2 removable plates (top / bottom / back)
Matériel	Acier (peint)

Environnement

Température de fonctionnement	-5 to +40°C
Température de stockage	-20 to +50°C
Humidité relative	10 to 95% noncondensing
Environnement	Intérieur
Indice de protection	IP30, indoor use only

Régulateur

Conformité	CE, REACH, RoHS 3, WEEE
Certification	BOSEC, CE

Output

General Fire + Fault supervised	2, 350 mA, 19.5 to 28 VDC (24 VDC nominal)
General Fire + Fault relay	2

KIDDE COMMERCIAL

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 9 September 2026 - 9:40