

## 2X-FR-FB2

### Addressable Fire Panel Repeater with Fire Brigade controls



#### Details

---

- Local or global repeater with Fire Brigade and Fire Protection controls with or without global control functionality
- Up to 40 LED Zone indicators for Fire and Fault with ample text space
- Auto configuration, setup wizards and default EN54 setup modes
- Ethernet port with TCP/IP for remote diagnostics, maintenance and programming
- EN54 compliant graphical LCD with icons and up to 256 zones
- Jog Dial with 4 soft buttons for simple and intuitive user control
- Aesthetic pleasing design with special paintable synthetic door
- Easy removable door and chassis for quick and clean installation
- All pluggable connectors
- 3 USB ports with memory stick support and RS232 for printer support
- Email notification for events directly from the panel (4 user accounts)
- Auxiliary 24VDC supply output with reset support
- 3 operator level menu structure (20 usernames and passwords)
- History log memory for 9999 events
- Up to 72 hours standby time and 30 minutes alarm
- Comes standard fitted with network board

# 2X-FR-FB2

## Addressable Fire Panel Repeater with Fire Brigade controls

### Technische specificaties

#### Algemeen

Netwerkgrootte (nodes) up to 64

#### Elektrisch

Type voeding VAC

#### Fysiek

Vormfactor Groot

Kleur Grijs (RAL 7035)

Type montage Oppervlaktemontage


#### Omgeving

Omgeving Binnen

#### Regelgeving

Conformiteit BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE

Certificering EN54-2, EN54-21, EN54-4, VdS

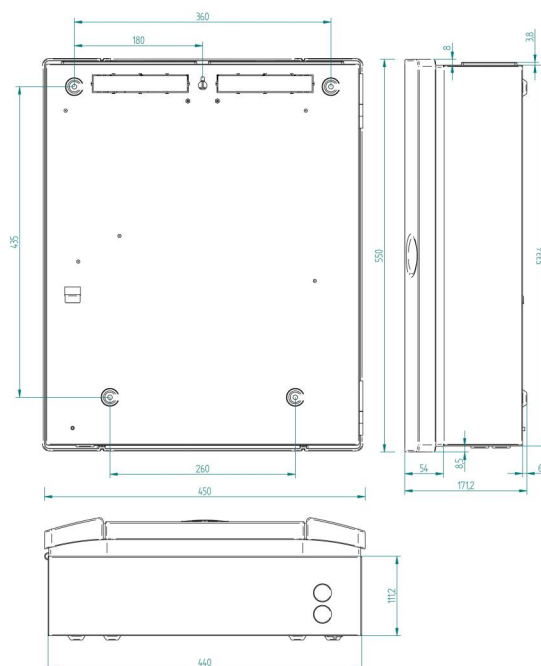

Als een bedrijf van innovatie behoudt Carrier Fire & Security zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar [be.firesecurityproducts.com](http://be.firesecurityproducts.com) of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 24 April 2024 - 15:21