

2X-FR-FB2-S-46

Addressable Fire Panel Repeater with Fire Brigade controls - Small cabinet



Details

- Local or global repeater with Fire Brigade and Fire Protection controls with or without global control functionality
- Up to 24 LED Zone indicators for Fire and Fault with space for a 4 digit number
- Auto configuration, setup wizards and default EN54 setup modes
- Ethernet port with TCP/IP for remote diagnostics, maintenance and programming
- EN54 compliant graphical LCD with icons and up to 256 zones
- Jog Dial with 4 soft buttons for simple and intuitive user control
- Aesthetic pleasing design with special paintable synthetic door
- Easy removable door and chassis for quick and clean installation
- All pluggable connectors
- 3 USB ports with memory stick support and RS232 for printer support
- Email notification for events directly from the panel (4 user accounts)
- Auxiliary 24VDC supply output with reset support
- 3 operator level menu structure (20 usernames and passwords)
- History log memory for 9999 events
- Up to 24 hours standby time and 30 minutes alarm
- Comes standard fitted with network board

2X-FR-FB2-S-46

Addressable Fire Panel Repeater with Fire Brigade controls - Small cabinet

Technische specificaties

Algemeen

Netwerkgrootte (nodes) up to 64

Elektrisch

Type voeding VAC

Fysiek

Vormfactor Klein

Kleur Grijs (RAL 7035)

Type montage Oppervlaktemontage


Omgeving

Omgeving Binnen

Regelgeving

Conformiteit BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE

Certificering EN54-2, EN54-21, EN54-4, VdS

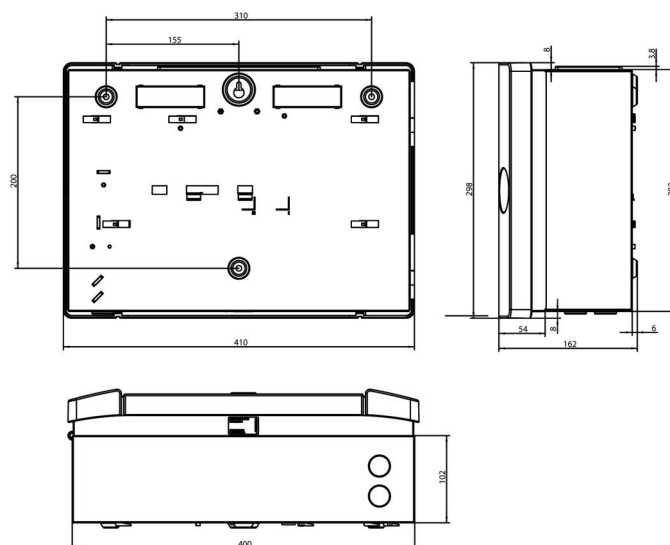

Als een bedrijf van innovatie behoudt Carrier Fire & Security zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 16 February 2024 - 12:24