

2X-F2-FB2-PRT-32

Addressable Fire Panel w/ Fire Brigade Controls with Printer- 2 Loop - French Belgian

Overview

The 2X Series life safety control systems are bringing the speed and functionality of high-end intelligent processing to small to mid-sized addressable applications. They feature an attractive contemporary design that fits with any decor. Special plastics allows for painting in any color and the easy to remove electronics will support in this matter. The gently lined door with the intuitive dark inset user interface and EN54 compliant graphical LCD offers a distinctive flair. The main controls are clearly, but discreetly highlighted with the focus on the central located Jog Dial. With the addressable detection and a full line of easily configured option cards and modules, USB and Ethernet® connectivity, these quick-to-configure systems offer versatility that benefits building owners and life safety system installers alike.

The Panel

The fire panels supplied in local language, with user interface with fire routing controls, with 2 loops that supports up to 256 devices in 512 zones, have standard 4 supervised sounder/fire-routing outputs, which can be used as freely programmable outputs as well. In addition 2 conventional relay outputs and 2 supervised outputs, working in pair and dedicated to common fire and fault conditions, as well as 2 user configurable inputs for monitoring and control are available. The build-in printer allows for printing live panel events or reports.

Options

The panel supports an extra 2 loop board that brings the panel to up to 512 zones with 4 additional programmable outputs. Add a network board to create a maximum of 32 nodes / 32 loops network of fire panels and fire panel repeaters (including conventional fire panels and fire panel repeaters up to a maximum of 64 conventional zones). Last but not least, in case separate zone indications are required, a 20 or a 40 zone fire/fault LED indicator board can be mounted in the panel or repeater with ample space for custom text.

Approvals & Compliance

- CE / CPD / EN54-2 / EN54-4 / EN54-21
- NEN2535 / NBNS21-100 compliant
- BS5839-1 compliant
- VdS and LPCB certified
- WEEE / RoHS compliant



Detailer

- Build-in thermal printer with paper replacement from the front
- 2 loops expandable to 4 with up to 512 zones with Fire Brigade & Fire Protection controls and 300 output groups
- Up to 40 LED Zone indicators for Fire and Fault with ample text space
- Auto configuration, setup wizard and default regional setup modes
- Ethernet port with TCP/IP for remote diagnostics, maintenance and programming
- EN54 compliant graphical LCD with icons and up to 256 zones
- Jog Dial with 4 soft buttons for simple and intuitive user control
- Aesthetic pleasing design with special paintable synthetic door
- Easy removable door and chassis for quick and clean installation
- All pluggable connectors
- 3 USB ports with memory stick support and RS232 for printer support
- Email notification for events directly from the panel (4 user accounts)
- Auxiliary 24VDC supply output with reset support
- 3 operator level menu structure (20 usernames and passwords)
- History log memory for 9999 events
- Up to 72 hours standby time and 30 minutes alarm
- Compatible with the new loop powered sounders/beacons and base sounders and the 2000 series detectors with replaceable optical chamber

2X-F2-FB2-PRT-32

Addressable Fire Panel w/ Fire Brigade Controls with Printer- 2 Loop - French Belgian

Tekniske specifikationer

Generelt

Maksimal systemkapacitet (antal enheder)	up to 32768
Netværksstørrelse (noder)	up to 64

Elektrisk

Strømforsyningstype	VAC
Driftsspænding	110/230 VAC (+10%/-15%) 50 / 60 Hz (±5%)
Nuværende forbrug	Nom. 0.6 / 1.3 A, Max. 1.5 / 3.15 A 2 / 4 A (fuse rating)

Sløjfe

Maksimal sløjfekapacitet	4
Type og vurdering	Recommended 2 core 1.5 mm ² twisted pair (cable)
Kabel klassificering	56ohm / 1µF max. 2 km (length)

Zone

Maksimal zonkapacitet	up to 512
-----------------------	-----------

Input

Indgangstype og klassificering	150 mA (max. load); Recommended 2 core 1.5 mm ² twisted pair (cable)
Programmerbar	2
Afslutning	15 kohm (EOL resistor)

Udgang

Output type og klassificering	Recommended 2 core 1.5 mm ² twisted pair (cable)
Brandalarmsignalering	2 x General Fire + Fault relay
Hjælpekraft	1 resetable, 500mA / 19.5-28VDC (24VDC nominal)
Programmerbar	4, 750mA / 19.5-28VDC (24VDC nominal) (supervised)
Afslutning	15 kohm (EOL resistor)

Standby batteri

Kapacitet	Max. 2 x 12V/18Ah (use supplied cables)
-----------	---

Fysisk

Form faktor	Stor
Fysiske dimensioner	450 x 550 x 171 mm (W x H x D)
Nettovægt	7.4 kg (without battery)
Forsendelsesvægt	10.1 kg
Farve	Grå (RAL 7035)
Monteringstype	Overflademontering
Kabelindgange	18 (20mm) / 2 (20mm) / 2 removable plates (Top / Bottom / Back)

Miljø

Driftstemperatur	-8 to +42°C
Stuetemperatur	-10 to +50°C
Relativ luftfugtighed	95% max. noncondensing
Miljø	Indendør
IP-vurdering	IP30: for indoor use only

Regulerende

Overholdelse	BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certificatie	EN54-13, EN54-2, EN54-21, EN54-4, VdS

Electrical


Mains supply cable type	3 x 1.5 mm ² (live, neutral, earth)
-------------------------	--

Output

General Fire + Fault supervised	2, 350mA / 19.5-28VDC (24 VDC nominal)
---------------------------------	--

Loop

Outputs	250 mA / 29VDC (29VDC to 36VDC)
---------	----------------------------------

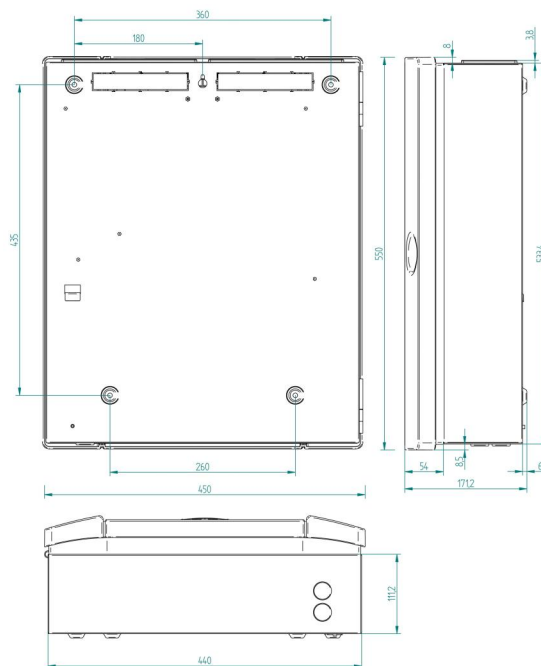

Carrier Fire & Security er et innovativt selskab og forbeholder sig ret til at ændre produktspecifikationer uden varsel. De nyeste produktspecifikationer kan du finde på dk.firesecurityproducts.com eller ved at kontakte din salgsrepræsentant hos.

Last updated on 16 February 2024 - 12:24