

ATS1481


ATS læser adresse konfigurationskort til ATS1190, ATS1192

Product Overview

The ATS1481 reader configuration card allow for an operator to specify the reader address of smart card readers without any programming device or menu configuration.

The reader address easily can be changed, by just badging at reader that needs to be changed.

Instructions are at the back of the card.

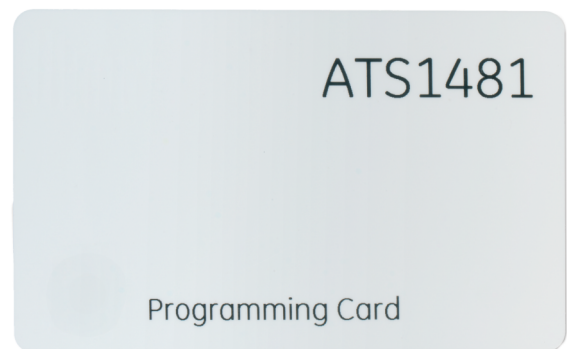

Detaljer

- Instructions on flip side of the card

ATS1481

ATS læser adresse konfigurationskort til ATS1190, ATS1192

Tekniske specifikationer

System

Læseafstand	0 to 30 cm
Tilpasset datamodel	Nej
Understøttede læsere	ATS Proximity Readers

Teknologi

Oplysningstype	Konfigurationskort, Nærhed
Credential driftsfrekvens	125 KHz

Udskrivning

Tryk på direkte overflade	Ja
---------------------------	----

Ordreinformation

Minimum ordremængde	1
Kort / tags i pakken	1

Fysisk

Materiale	PVC
Form faktor	CR80 (Credit)
Fysiske dimensioner	86 x 54 mm
Farve	Hvid
Kortetiket	Programming Card

