

# TVC-2401

## TruVision HD-TVI Analog Boks kamera, PAL,

### Overview

---

The new TruVision line includes a comprehensive family of HD-TVI cameras for stand-alone or integrated installations, designed for optimal image quality over existing coaxial cable.

Ideal for improving video quality of existing analog surveillance system installations ranging from convenience stores to retail mall parking lots, the TruVision HD-TVI line has the right cameras for your new or existing project and can help you stay within budget constraints without compromising security needs.

The cameras have true day/night capabilities, providing color images by day and black-and-white images under IR operation in low light applications. TruVision HD-TVI cameras are available with either fixed lens or varifocal lens or motorized lens.

Form factors include box, dome, and traditional bullet cameras. Bullet models offer a familiar form factor that features a pre-installed wall mount with cable management. Bullet and domes are IP66 rated for outdoor installation and selected dome models are available with an IK10 vandal-rated enclosure.

All TruVision HD-TVI cameras are designed to install quickly and easily, right out of the box, so you can be up and running in no time.

### Installation

---

The bullet and dome provide motorized lens control which facilitates installation and image adjustment. From the TVR12HD/44HD the installer can remotely control the focal length and precisely adjust the camera focus, simplifying both installation and maintenance.



### Detaljer

---

- 1080p HD resolution
- HD-TVI technology for transmitting HD quality video over existing coax cable
- True day/night functionality
- Wide dynamic range
- Smart focus
- Dual power 12 VDC / 24 VAC
- Provide OSD control via TruVision up the coax and built-in menu button

# TVC-2401

## TruVision HD-TVI Analog Boks kamera, PAL,

### Tekniske specifikationer

#### Generelt

Teknologi	HD-TVI-analog
Videostandard	PAL

#### Kamera

Sensorstørrelse	1/3"
Maks. opløsning	1080p
Sensorscanning	Progressive
Sensortype	CMOS
Totalt antal piksler (H x V)	1920 x 1080
Effektive pixels (H x V)	1920 x 1080
Digital S/N-forhold	More than 52 dB
Lukketid	1/25 to 1/50,000 s

#### Belysningsdydeevne

WDR-type	True WDR
WDR	120 dB
Digital støjreduktion	3D DNR
Dag nat	True Day/Night
Motoriseret IR-skåret filter	Ja
Farvesensitivitet	0.01 Lux @ (F1.2, AGC ON), 0.014 Lux @ (F1.4, AGC ON)
Infrarød (IR)	Nej

#### Indkodning

Hovedstrømskomprimeri	H.264 ng
Understrømskomprimeri	H.264, MJPEG ng

#### Linse

Objektivmonteringstype	C/CS (auto iris)
------------------------	------------------

#### Netværk

Integration	CGI, ONVIF, PSIA
-------------	------------------

#### Elektrisk

Strømforsyningstype	VAC
Strømforsyningsværdi	12 VDC / 24 VAC
Strømforgbrug	12 VDC: max. 6 W
Nuværende forbrug	12 VDC: max. 0.5A

#### Fysisk

Fysiske dimensioner	69.2 x 57.3 x 148.7 mm 2.72 x 2.56 x 5.85 in.
Nettovægt	520 g 1.15 lbs.
Form Factor	Box

#### Miljø

Vandalt bevis	Nej
Miljø	Indendør
Driftstemperatur	-30 to 60°C -22 to +140°F
Stuetemperatur	-20 to +70°C -4 to +158°F


#### Regulerende

Overholdelse	C-tick, CE, FCC, REACH, RoHS, UL, WEEE
--------------	--

#### Kamera

Sync. system	Internal
Video output	Dual HD-TVI or 960H
OSD	Built-in OSD button, TruVision Coax OSD control on both HD-TVI and 960H

Unit: mm

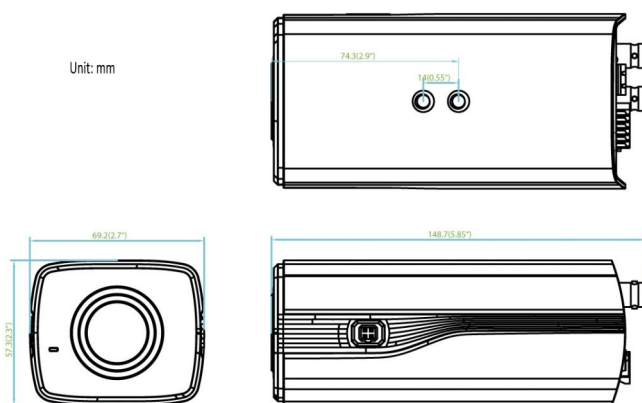

Carrier Fire & Security er et innovativt selskab og forbeholder sig ret til at ændre produktspecifikationer uden varsel. De nyeste produktspecifikationer kan du finde på [dk.firesecurityproducts.com](http://dk.firesecurityproducts.com) eller ved at kontakte din salgsrepræsentant hos.

Last updated on 5 December 2023 - 17:54