

TVN-2216P-18T

TruVision™ NVR 22P optager, 16 IP kanaler, 18TB, H.265 NVR, 2HE

Overview

TruVision NVR 22P (TVN 22) is a robust high performance H.264/H.265 network video recorder. With a total bandwidth of 256 Mbps (16-channel) or 320Mbps (32- and 64 channel) available, the TVN 22P is able to connect up to 16/32/64 IP cameras and provide real time recording (25/30 fps) at Full HD 1080p resolution on all channels simultaneously. With its fully flexible bandwidth allocation, the TVN 22P allows recording resolutions up to 8MPX at various frame rates.

Ease of use

TVN 22P was designed to make system configuration and overall use easier for both the installer and end-users through features such as: ezDDNS, start-up wizards, plug & play hard drives, auto discovery of natively supported cameras and is fully compatible with TruVision Navigator (as of 6.0SP1) and TVRmobile 2.4.

H.265

The TVN 22P is supporting both H.264 and H.265 compression techniques. The H.265 compression is the next evolution of video encoding. Using H.265 will result in a reduced file size for the same video content and a reduced transmission bandwidth compared to H.264. This means that for the same storage capacity more video can be stored when using H.265 than H.264 encoding. To use the H.265 encoding in the TVN 22, truVision H.265 cameras need to be used.


Ease of use

Thanks to its 2U housing, the maximum on-board storage capacity for the TVN 22P is 48TB, using eight six TB hard drives. The hard drives can be accessed via the lockable front panel door, allowing customers to easily expand storage as their system and/or requirements grow. Additionally, TVN 22P supports RAID 0,1,5,6,10 for storage redundancy. Recording options include continuous, event and alarm. The three modes can be combined, to ensure that the most efficient recording is possible.

TruVision OH

TVN 22P has the OH (Osborne-Hoffmann) alarmreceiver module embedded inside. The OH receiver is an alarm message receiver and can connect to up to three Interlogix IP intrusion panels that report in SIA or XSIA format.

Alarm messages, disarming and arming messages can be send from the alarm panel to the recorder, which then can take actions (trigger alarm recording, send a PTZ to a preset, run a shadow tour or preset tour, trigger an alarm output or send a notification message to TVRmobile). Also the heartbeat message between panel and recorder is monitored. This solution offers straightforward alarm verification and is free of charge.

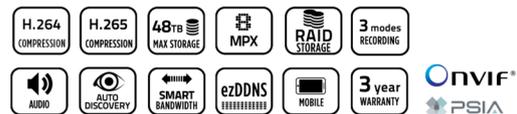

Detaljer

- Linux embedded Play and Play configuration
- Up to 256/320 Mbps camera recording bandwidth
- Up to 16/32/64 channels to be connected
- Up to 48TB embedded storage (8x 6TB)
- RAID 0,1, 5,10 support
- Flip-open front panel for easy HDD access, servicing & expansion
- New icon based front pane
- Real-time Full HD recording
- Motion detection, VCA, privacy masking, tamper detection
- TruVision IP camera auto-discovery
- Third party camera support via ONVIF and PSIA
- IP camera configuration import/export
- Custom protocol configuration (RTSP streaming)
- Network redundancy
- Integration of Carrier IP intrusion panels via SIA/XSIA reporting
- Recorder failover functionality (one failover unit per 4 operational recorders)
- TVK-800 IP keypad support (H.265 is not supported by the TVK-800)
- USD DVD burner support
- TruVision Navigator license-free client/host or standalone application (6.0SP1)
- TVRmobile app for Android and iOS

TVN-2216P-18T

TruVision™ NVR 22P optager, 16 IP kanaler, 18TB, H.265 NVR, 2HE

Tekniske specifikationer

Generelt

| | |
|--------------------------|-----|
| Teknologi | IP |
| Kan monteres på stativ | Ja |
| Rackstørrelse | 2 U |
| Aftagelig blæser | Nej |
| Redundant strømforsyning | Nej |

Video / audio input

| | |
|---|--|
| Kamerakanaler | 16 |
| Edge failover-optagelse | 16 |
| Maks. båndbredde pr. kanal | 16 Mbps |
| Kameraets båndbredde | 256 Mbps |
| Maks. IP-lyd ind | 16 |
| Understøttede videokomprimeringsstandarder | H.264, H.265, MPEG-4 |
| Understøttede standarder for videostreaming | Onvif, PSIA, RTSP, RTSP Custom Protocols |

Lokal visning

| | |
|--------------------------------------|-------------------|
| HDMI-udgang | 2 |
| HDMI-version | 2.0 |
| VGA-udgang | 2 |
| BNC output | 1 |
| Maks. lokal outputopløsning | 4K |
| OSD for synkron afspilning (kanaler) | Up to 16 channels |
| Omvendt afspilning OSD (kanaler) | 1 |

Fjernvisning

| | |
|---|--|
| Total tilgængelig båndbredde | 256 Mbps |
| Maks. livestreams | 128 |
| Maks. afspilning af streams | 128 |
| Maks. afspilningsopløsning webbrowser | 8 MPX |
| Maks. samtidig afspilning webbrowser | Max. 16 tiles (4x4) |
| Omvendt afspilningswebbrowser (kanaler) | Up to 9 channels, depending on PC performance |
| Softwarekompatibilitet | Advisor Management Software (ATS8600), TruVision Navigator, TVRmobile, Web Browser |
| Browser kompatibilitet | Google Chrome, Internet Explorer, Mozilla Firefox, Safari |

Opbevaring

| | |
|------------------------------|---|
| Opbevaringskapacitet | 18 TB |
| SATA-grænseflader | 8 |
| Maks. kapacitet pr. HDD (TB) | 8 |
| Maksimal optagelsesopløsning | 12 MP |
| Optagelsestilstande | Alarm, Event, Manual, Time-lapse high, Time-lapse low |
| Ekstern lagring | eSATA, NAS, SAN |
| Understøttede RAID-niveauer | RAID 0, RAID 1, RAID 5 |
| Harddiskredundans | Ja |
| Harddiskgruppering | Ja |
| SAS udvidelse | Nej |
| Flip-open frontpanel | Ja |
| Automatisk arkivering | Ja |
| Hot reserveoptager | Ja |
| Edge failover-optagelse | Ja |

Netværk

| | |
|-----------------------------|---|
| Netværksinterfacekort (NIC) | 2 |
| NIC-type | RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface |
| NIC-tilstand | Network Redundancy |
| Netværksporte pr. NIC | 1 |
| DNS-support | DDNS, ezDDNS, Ingen IP |
| HTTPS support | Ja |

Ekstern interface

| | |
|--------------------------|--------|
| USB-grensesnitt tilbage | 1 |
| USB-grensesnitt foran | 2 |
| Seriell grænseflade | RS-232 |
| Alarmindgange | 16 |
| Alarmuitgangen | 4 |
| Maks. analoge lydudgange | 1 |

Elektrisk

| | |
|---------------------------|-----------------|
| Strømforsyningstype | 100 til 240 VAC |
| Strømforbrug uden HDD (W) | <=30 W |

Fysisk

| | |
|---------------------|-------------------------------|
| Fysiske dimensioner | 442 x 442 x 92 mm (W x D x H) |
| Farve | Sort |

Miljø



| | |
|-----------------------|--------------------------------|
| Driftstemperatur | -10 to +55°C (14 °F to 131 °F) |
| Relativ luftfugtighed | 10 to 90% |

Regulerende

| | |
|--------------|---------------------|
| Overholdelse | CE, REACH, RoHS, UL |
|--------------|---------------------|

TVN-2216P-18T

TruVision™ NVR 22P optager, 16 IP kanaler, 18TB, H.265 NVR, 2HE

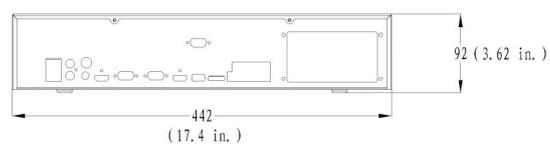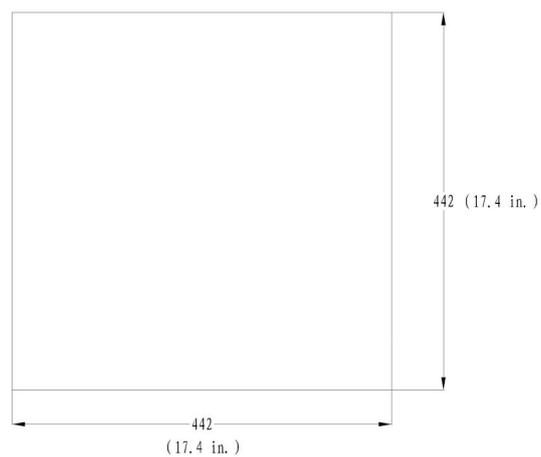

Carrier Fire & Security er et innovativt selskab og forbeholder sig ret til at ændre produktspecifikationer uden varsel. De nyeste produktspecifikationer kan du finde på dk.firesecurityproducts.com eller ved at kontakte din salgsrepræsentant hos.

Last updated on 18 April 2024 - 16:55