

# TVN-2232P-2T

## TruVision™ NVR 22P optager, 32 IP kanaler, 2TB, H.265 NVR, 2HE

### Overview

TruVision NVR 22P (TVN 22) is a robust high performance H.264/H.265 network video recorder. With a total bandwidth of 256 Mbps (16-channel) or 320Mbps (32- and 64 channel) available, the TVN 22P is able to connect up to 16/32/64 IP cameras and provide real time recording (25/30 fps) at Full HD 1080p resolution on all channels simultaneously. With its fully flexible bandwidth allocation, the TVN 22P allows recording resolutions up to 8MPX at various frame rates.

### Ease of use

TVN 22P was designed to make system configuration and overall use easier for both the installer and end-users through features such as: ezDDNS, start-up wizards, plug & play hard drives, auto discovery of natively supported cameras and is fully compatible with TruVision Navigator (as of 6.0SP1) and TVRmobile 2.4.

### H.265

The TVN 22P is supporting both H.264 and H.265 compression techniques. The H.265 compression is the next evolution of video encoding. Using H.265 will result in a reduced file size for the same video content and a reduced transmission bandwidth compared to H.264. This means that for the same storage capacity more video can be stored when using H.265 than H.264 encoding. To use the H.265 encoding in the TVN 22, TruVision H.265 cameras need to be used.

### Ease of use

Thanks to its 2U housing, the maximum on-board storage capacity for the TVN 22P is 64TB, using eight 8 TB hard drives. The hard drives can be accessed via the lockable front panel door, allowing customers to easily expand storage as their system and/or requirements grow. Additionally, TVN 22P supports RAID 0,1,5,6,10 for storage redundancy. Recording options include continuous, event and alarm. The three modes can be combined, to ensure that the most efficient recording is possible.

### TruVision OH

TVN 22P has the OH (Osborne-Hoffmann) alarmreceiver module embedded inside. The OH receiver is an alarm message receiver and can connect to up to three Interlogix IP intrusion panels that report in SIA or XSIA format.

Alarm messages, disarming and arming messages can be send from the alarm panel to the recorder, which then can take actions (trigger alarm recording, send a PTZ to a preset, run a shadow tour or preset tour, trigger an alarm output or send a notification message to TVRmobile). Also the heartbeat message between panel and recorder is monitored. This solution offers straightforward alarm verification and is free of charge.



### Detaljer

- Linux embedded Play and Play configuration
- Up to 256/320 Mbps camera recording bandwidth
- Up to 16/32/64 channels to be connected
- Up to 64TB embedded storage (8x 8TB)
- RAID 0,1, 5,6,10 support
- Flip-open front panel for easy HDD access, servicing & expansion
- New icon based front pane
- Real-time Full HD recording
- Motion detection, VCA, privacy masking, tamper detection
- TruVision IP camera auto-discovery
- Third party camera support via ONVIF and PSIA
- IP camera configuration import/export
- Custom protocol configuration (RTSP streaming)
- Network redundancy
- Integration of Carrier IP intrusion panels via SIA/XSIA reporting
- Recorder failover functionality (one failover unit per 4 operational recorders)
- TVK-800 IP keypad support (H.265 is not supported by the TVK-800)
- USD DVD burner support
- TruVision Navigator license-free client/host or standalone application (6.0SP1)
- TVRmobile app for Android and iOS

# TVN-2232P-2T

TruVision™ NVR 22P optager, 32 IP kanaler, 2TB, H.265 NVR, 2HE

## Tekniske specifikationer

### Generelt

Teknologi	IP
Kan monteres på stativ	Ja
Rackstørrelse	2 U
Aftagelig blæser	Nej
Redundant strømforsyning	Nej

### Video / audio input

Kamerakanaler	32
Understøttede videokomprimeringsstandarder	H.264, H.265, MPEG-4

Understøttede standarder for videostreaming	Onvif, PSIA, RTSP, RTSP Custom Protocols
---	--

### Lokal visning

HDMI-udgang	2
HDMI-version	2.0
VGA-udgang	2
BNC output	1
Maks. lokal outputopløsning	4K

### Fjernvisning

Softwarekompatibilitet	Advisor Management Software (ATS8600), TruVision Navigator, TVRmobile, Web Browser
Browser kompatibilitet	Google Chrome, Internet Explorer, Mozilla Firefox, Safari

### Opbevaring

Opbevaringskapacitet	2 TB
Maksimal optagelsesopløsning	12 MP
Optagelsestilstande	Alarm, Event, Manual, Time-lapse high, Time-lapse low
Ekstern lagring	eSATA, NAS, SAN
Harddiskredundans	Ja
Harddiskgruppering	Ja
SAS udvidelse	Nej
Flip-open frontpanel	Ja
Automatisk arkivering	Ja
Hot reserveoptager	Ja
Edge failover-optagelse	Ja

### Netværk

NIC-type	RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
NIC-tilstand	Network Redundancy
DNS-support	DDNS, ezDDNS, Ingen IP
HTTPS support	Ja

### Ekstern interface

USB-grensesnitt tilbage	1
USB-grensesnitt foran	2
Seriell grænseflade	RS-232
Alarmindgange	16
Alarmuitgangen	4
Maks. analoge lydudgange	1

### Elektrisk


Strømforsyningstype	100 til 240 VAC
---------------------	-----------------

### Fysisk

Farve	Sort
-------	------

### Regulerende

Overholdelse	CE, REACH, RoHS, UL
--------------	---------------------

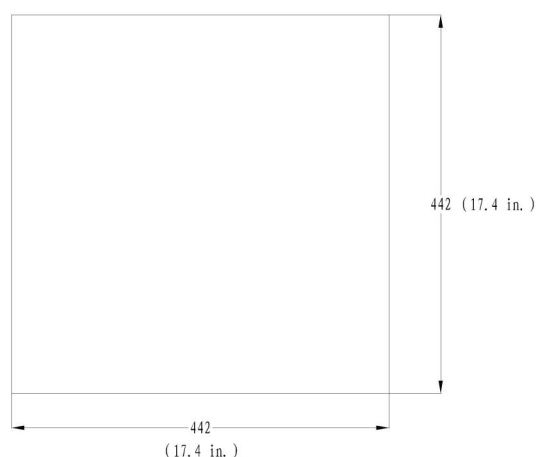

Carrier Fire & Security er et innovativt selskab og forbeholder sig ret til at ændre produktspecifikationer uden varsel. De nyeste produktspecifikationer kan du finde på [dk.firesecurityproducts.com](http://dk.firesecurityproducts.com) eller ved at kontakte din salgsrepræsentant hos.

Last updated on 18 April 2024 - 16:56