

# TVW-5603

**TruVision 2MPx, H.265/H.264, IP Wedge kamera, fast objektiv 2.8mm, Ægte D/N, WDR, 10m IR, Micro SD/SDHC/SDXC Slot, Audio, I/O, PoE (802.3-af)/12VDC, IP66, IK8, Hvid**

## Overview

---

The TruVision Series 6 line of IP wedge cameras leverages the latest H.265 video compression technology to bring state-of-the-art, high-definition pictures to the mass video surveillance market. With video resolutions from 2 megapixel to 4K, these IP cameras represent a flexible video surveillance device to meet any need. Equipped with advanced technology and signal processing capability, they effectively capture video under challenging conditions.

TruVision cameras utilize H.265 and/or H.264 compression technology with triple-streaming capability, making it easy to manage the camera's bandwidth usage. Recording to a local MicroSD card (not included) protects data in the event of network disruptions.

These cameras go above and beyond standard motion detection with enhanced alarm capabilities, including cross line detection, intrusion detection and face detection features. Each is user-configurable to best suit the installation environment. A Region of Interest function (ROI) ensures specific portions of an image are given priority during instances of high network traffic or network degradation.



## Detaljer

---

- Maximum Resolution: 1920 x 1080
- H.265 and/or H.264 compression with triple-streaming functionality
- ONVIF Profile G and S open standards
- Edge recording up to 128GB SDHC card
- Up to 10 m IR illumination
- Up to 120 dB Wide Dynamic Range
- Video intelligence: face detection, intrusion detection, cross line detection
- Audio and alarm I/O
- 2.8mm lens model available in grey, white and black housing

# TVW-5603

TruVision 2MPx, H.265/H.264, IP Wedge kamera, fast objektiv 2.8mm, Ægte D/N, WDR, 10m IR, Micro SD/SDHC/SDXC Slot, Audio, I/O, PoE (802.3-af)/12VDC, IP66, IK8, Hvid

## Tekniske specifikationer

### Generelt

Teknologi	IP
Videostandard	NTSC, PAL
Image settings	Hallway View, Mirror, ROI (Region Of Interest)
Softwarekompatibilitet	OnGuard, Prism, TruVision Navigator, TVRmobile, UltraView, Web Browser

### Kamera

Sensorstørrelse	1/2.8"
Maks. løsnings	2 MP
Sensorscanning	Progressive
Sensortype	CMOS
Lukketid	1/3 to 1/100,000 s

### Belysningsdydeevne

WDR-type	True WDR
WDR	120 dB
Digital støjreduktion	3D DNR
Dag nat	True Day/Night
Motoriseret IR-skåret filter	Ja
Farvesensitivitet	0.01 Lux @ (F2.25, AGC ON), 0.028 lux @ (F2.0, AGC ON)
S / H-følsomhed	0 lux with IR on
S / H-udløser	Auto/Schedule/Triggered by alarm in
Infrarød (IR)	Ja
IR-rækkevidde	Up to 10 m

### Indkodning

Video streams	3
Hovedstrømskomprimering	H.264, H.265
Understrømskomprimering	H.264, H.265, MJPEG
Tredje strømskomprimering	H.264, H.265
Video bithastighed	32 to 16 Mbps
Hovedstrømsopløsninger	1280 x 720 (XVGA), 1280 x 960 (720p), 1920 x 1080 (1080p)
Understrømsopløsninger	320 x 240 (QVGA), 640 x 360 (nHD), 640 x 480 (VGA), 704 x 576 (4CIF)
Tredje strømsopløsninger	1280 x 720 (XVGA), 1920 x 1080 (1080p), 352 x 288 (CIF), 640 x 360 (nHD)
Maks. opløsning @ fps	1920 x 1080 @ 25/30 fps

### Linse

Objektivtype	Fast
Brændvidde	2.8 mm: Horizontal field of view: 114°, Vertical field of view: 62°, Diagonal field of view: 135°
f-stop	F2.25

### Netværk

Netværksgrænseflade	RJ-45 10/100 Mbps self-adaptive Ethernet interface
Integration	ONVIF Profile G, ONVIF Profile S
Understøttede netværksprotokoller	802.1x, Bonjour, DDNS, DHCP, DNS, FTP, HTTP, HTTPS, ICMP, IGMP, IPv4, IPv6, NTP, PPPoE, QoS, RTCP, RTP, RTSP, SMTP, SNMP, TCP/IP, UPnP

### Audio

Lydkomprimering	G.711, G.722.1, G.726, MP2L2
Lyd ind	2 inputs: Line in or Mic in (built-in microphone)
Audio ud	1 output (line out)
Audio bithastighed	64kbps(G.711) / 16kbps(G.722.1) / 16kbps(G.726) / 32-192kbps(MP2L2)

### Alarm I/O

Alarmindgange	1
Alarmuitgangen	1

### Opbevaring

Understøttelse af lokal opbevaring	Ja
Lokal opbevaringstype	Built-in Micro SD/SDHC/SDXC card slot
Max. SD card capacity	128GB

### Video-intelligens

AlarmtrIGGER	HDD error, HDD full, Invalid login, IP address conflict, Motion detection, Network disconnected, Video tampering
ROI	Support 1 fixed region for main stream and sub-stream
Smart event	Advanced motion detection, Face detection, Intrusion detection, Line crossing detection

### Elektrisk

Driftsspænding	12 VDC ± 25%, Φ 5.5 mm coaxial power plug PoE (802.3af, class 3)
Strømforbrug	max. 8 W @ 12 VDC

### Fysisk

Fysiske dimensioner	110 x 56.4 mm 4.33 x 2.22 in.
Nettovægt	395 g 0.87 lb.
Farve	Hvid
Form Factor	Kille

### Miljø

Vandalt bevis	Ja
Effektvurdering	IK8
Miljø	Udendørs
Driftstemperatur	-30 to +60°C -22 to +140°F
Relativ luftfugtighed	<95% (non-condensing)
IP-vurdering	IP66

# TVW-5603


TruVision 2MPx, H.265/H.264, IP Wedge kamera, fast objektiv 2.8mm, Ægte D/N, WDR, 10m IR, Micro SD/SDHC/SDXC Slot, Audio, I/O, PoE (802.3-af)/12VDC, IP66, IK8, Hvid

## Regulerende

Overholdelse CE, FCC, REACH, RoHS, UL, WEEE

## Kompatible produkter

Kategori	Reference	Beskrivelse
Beslag og Montering	TVW-BB1	TruVision Wedge kamera bagboks (bruges sammen med S6 serien af wedge kameraer)

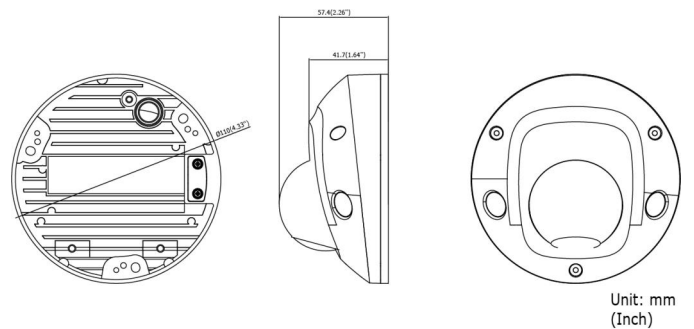

Carrier Fire & Security er et innovativt selskab og forbeholder sig ret til at ændre produktspecifikationer uden varsel. De nyeste produktspecifikationer kan du finde på [dk.firesecurityproducts.com](http://dk.firesecurityproducts.com) eller ved at kontakte din salgsrepræsentant hos.

Last updated on 18 April 2024 - 15:09