

ATS1000A-IP-SM-HK

Kit ATS1000A-IP-SM including ATS1135 keypad

Intrusion Alarm System

The Advisor Advanced product line is the latest offspring from the Advisor CD and Advisor Master product lines. Its heritage consists of well established functions and features of the Advisor series, but it also has been designed to meet the challenges posed by future trends. Communication standards are currently changing. Communications are moving away from PSTN networks towards wireless and IP networks. So, importantly, this product line can accommodate different communication options thereby offering long-term flexibility, reliability and availability. The Advisor Advanced products can be configured locally through an onboard USB port.

Based on the Advisor CD user interface this allows for a rapid familiarity with the system yet new features are easy to learn. There are both quick and full menu browsing facilities available. A built-in "hint" key provides easily accessed help about the options so the user can quickly become familiar with the menu structure.

Approvals in Europe start to converge to one standard: EN50131. The new Advisor Advanced product line is designed with EN50131 compliancy as a standard.

Using existing ATS accessories (keypads, readers, expanders), Advisor Advanced panels provide for a reliable system with a wide range of options to extend its functionality. Automatic hardware enrollment quickly adds devices.

Advisor product line

The newly launched Advisor Advanced product range is a family of products that has evolved from the long-running and successful Advisor CD and Advisor Master ranges, which offered well-known and appreciated products. The Advisor Advanced range captures the strongest assets from both these ranges and brings them together into a new, future-proof platform that enables ease of use, flexibility and reliability. It allows growth today as well as tomorrow.

The range consists of different products such as the ATS1000A and ATS2000A in a variety of configurations, all with the same basic methods for interacting with users or capabilities.


Ease of use

The Advisor Advanced system is easy to use in all situations. The Advisor Advanced range offers easy menu access and menu browsing as well as quick-access to menu items for those already familiar with the menu structure. Hints are available at the press of a button to provide tips during configuration.

End-users will find it easy to use for every day-to-day functions like set and unset. Using clear and easy to understand techniques, users are guided through the functions they need to carry out, including exception functions such as isolating zones or inhibiting faults.

Wireless and wired support

The Advisor Advanced system is a full hybrid system. It allows for connection of any combination of wired and wireless devices. Each

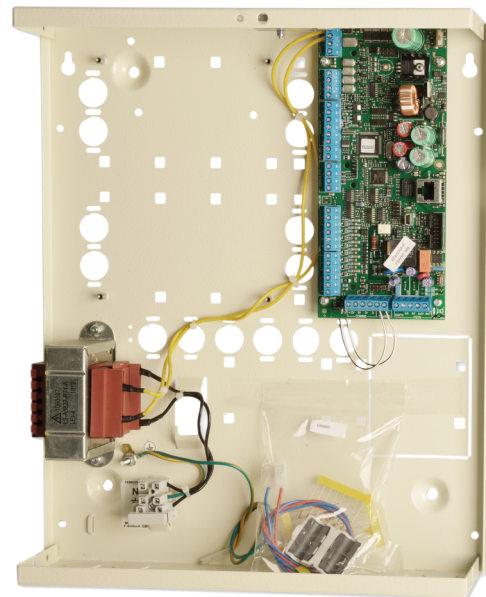

Einzelheiten

- 8 onboard zone inputs
- Max 32 zones: wired, wireless or mixed
- Economic input and output plug-in expansion
- Up to 16 shock sensor inputs
- 4 areas
- Up to 50 users
- EN50131 Security grade 2 / Environmental class 2
- USB port for local configuration
- Onboard PSTN dialler for reporting or configuration
- Multilingual: each user his own language
- Intergated 10/100Mb Ethernet connection
- IP Alarm reporting to OH-NETREC receiver - Optional GPRS
- U/D over IP / GPRS
- IP Diagnostics
- Dynamic/Static IP & DNS support
- Auto Arming - Schedules - Times Outputs

input can be assigned to a zone. A total of 32 zones can be setup. For example, the system could be set up to have 32 wired zones, 32 wireless zones or a combination such as 24 wireless zones + 8 wired zones and vice versa.

Inputs and outputs can be expanded by using Data Gathering Panels. However, it's also possible to expand the system by using an economic plug-in expansion that fits on top of the main control panel thus reducing the space required in a housing. Inputs can be used in a variety of ways, including combined tamper and alarm or combined tamper, alarm and anti-mask.

The Advisor Advanced system also allows for all inputs on the Main Control Panel and plug-in expansions to be shock sensor zones, reducing the need for external shock sensor analyzers.

Two onboard high current outputs are supervised to detect any tampering of the siren.

Alarm reporting

An intrusion control system depends on alarm reporting to deliver any alarm or failure as quickly as possible. The Advisor Advanced system offers different methods to do so, varying from normal alarm reporting to Alarm Receiving Centers, as well as reporting to end-users through voice reporting. Different physical paths can be used: standard onboard PSTN but also GSM or ISDN. Via the ATS7310 GSM module the ATS Advanced supports analogue voice reporting and SMS reporting to any mobile device.

ATS1000A-IP-SM-HK

Kit ATS1000A-IP-SM including ATS1135 keypad

Technische Spezifikationen

System

Produktlinie	Advisor Advanced
Produktart	Einbruch
Zentralentyp	Hybrid
Kit	Ja
Anzahl der Bedienteile/Leser	8
Abgesetzte Meldegruppe 7 erweiterung	

Anzahl der Alarmgruppen	16
Spezifisches Kabel	WCAT52 WCAT54

Eingänge

Max. Anzahl von Eingänge	32
Onboard-Eingänge	8
Eingangserweiterung	8

Ausgänge

Anzahl der Ausgänge	128
Anzahl der Onboard-Ausgänge	5

Bereich

Anzahl der Bereiche	4
---------------------	---

Benutzer / Karten

Max. Anzahl von Benutzern	50
Max. Anzahl von Karten	50
Max. Anzahl von PIN Codes	50

Kommunikation

Onboard Übertragungsart	IP
Übertragungserweiterung	GSM/GPRS
Datenbus-Typ	RS485

Elektrische Angaben

Netzteilwert	230 VAC +10%, -15%, 50 Hz
Hauptplatine Stromverbrauch	100 mA
Maximaler Systemstrom	1000 mA at 13.8 V \pm 0.2 V
Max. AUX-Strom	840 mA
Sicherungen automatisch zurücksetzen	5
Glasbruchsicherungen	1

Physikalisch

Abmessungen	250 x 250 x 86 mm
Gehäuse	Mittleres Metall

Umweltbedingungen

Betriebstemperatur	-10 to +55°C
Relative Luftfeuchtigkeit	95% noncondensing
Umweltklasse	Class II, indoor
IP Klassifizierung	IP30

Regulativ

EN50131 Klasse	Klasse 2
----------------	----------