



SMA-LP-BIO

MA SIGMA Lite Plus - Bio, 2.8 inch QVGA touchscreen, MoNo-factor Bio only, IP65, 500 users, CE

MA SIGMA Lite & MA SIGMA Lite Plus Series

Engineered with the same attention to detail and performance as their predecessor, the MorphoAccess® SIGMA Lite terminals are specifically designed to equip narrow mounting surfaces, such as glass/aluminum door Mullions, turnstiles or server rack doors. With two designs (with touchscreen: MA SIGMA Lite Plus ; without touchscreen: MA SIGMA Lite) and multiple embedded card reader options, there are a variety of models to address the widest range of deployment scenarios, both indoor and outdoor.

Embedded web server

The MA SIGMA Lite Series enables on-device enrollment, terminal configuration and transaction log retrieval thanks to the embedded web server. Moreover, it can be used with any device (PC, laptop, tablet, smartphone), any operating system (Windows, Android, iOS) or any web browser (Google Chrome, Mozilla Firefox, Safari and Internet Explorer).

Enhanced interactivity

Thanks to the 2.8" QVGA touchscreen on the MA SIGMA Lite Plus Series, you can benefit from an enhanced user experience. The MA SIGMA Lite Plus holds T&A in and out function keys, User ID/PIN/BioPin management and intuitive icons and live messages.

Compatible with existing installations

The MA SIGMA Lite Series can be used to upgrade an existing installation or to complement the installation with MorphoAccess® SIGMA (Lite) devices using the MorphoManager application or MIK SDK on a Morpho network or the SecureAdmin™ application or SecureSDK™ on a BioScrypt network.

Enhanced security features

The MA SIGMA Lite Series encompasses the latest and greatest anti-fraud features, such as: fake finger detection, duress finger, timed anti-pass back function and banned/authorized user lists.



Einzelheiten

- Leading fingerprint technology inside - 1:10,000 user identification in 1 second
- High capacity - 30,000 templates, 250,000 IDs in authorized user list, 1 million logs
- Advanced anti-fraud features
- Flexibility - Optional Prox, ICLASS or MIFARE/DESFire contactless card reader
- Tough design - IP65 rated and vandal resistant (IK08, SIGMA Lite only)

SMA-LP-BIO

MA SIGMA Lite Plus - Bio, 2.8 inch QVGA touchscreen, MoNo-factor Bio only, IP65, 500 users, CE

Technische Spezifikationen

System

Max. Leserabstand zur Zentrale	Ethernet: 100 m, RS485: 1219 m
Austrittstaster	Nein
CSN (Kartenseriennummer)	Nein
Benutzerdefiniertes Datenmodell	Nein
Anzahl LEDs	1

Technologie

Lesertyp	Biometrisch
----------	-------------

Biometrik

Biometrischer Typ	Fingerabdruck
Biometrischer Sensortyp	Optisch

Schnittstelle & Verbindungen

Schnittstelle	Ethernet, OSDP V2, OSDP V2 Sicherer Kanal, RS-485, USB, Wiegand
Verbindungstyp	Netzwerk, Zopf
Anschlussleitungslänge	30 cm

Sabotagetyp

Sabotagekontakt	Nein
Öffnungskontakt	Ja

Betrieb

Autonome	Ja
PIN-Tastatur	Ja
PIN-Länge	6

Elektrische Angaben

Netzteil	PoE-Eingang
Netzteilwert	12 to 24 VDC

Physikalisch


Abmessungen	68 x 156 x 62 mm
Nettogewicht	280 g
Liefergewicht	325 g
Farbe	Schwarz
Material	Polycarbonat
Formfaktor	Überdimensioniert
Montage	Oberflächenmontage

Umweltbedingungen

Vandalismussicher	Nein
Umgebung	Draussen
Betriebstemperatur	-20 to +55°C
Lagertemperatur	-20 to +55°C
Relative Luftfeuchtigkeit	10 to 80% noncondensing
IP Klassifizierung	IP 65

Regulativ

Kompatibilität	CE, FCC, ICASA, REACH, RoHS, UL 294, WEEE
----------------	---

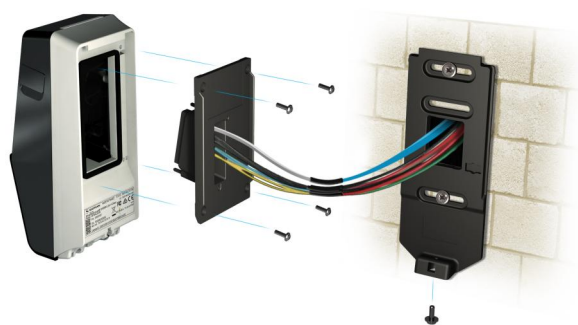

Als innovatives Unternehmen behält sich Kidde Global Solutions das Recht vor, Produktspezifikationen ohne Ankündigungen zu ändern. Für die aktuellsten Produktspezifikationen, besuchen Sie bitte de.firesecurityproducts.com online oder kontaktieren Sie bitte unsere Vertriebsmitarbeiter.