

# TVT-4403

## TruVision 5 MPX HD-TVI Turret camera, 2.8 mm fixed lens - NTSC

### Overview

---

TruVision HD-TVI Turret Cameras from Interlogix deliver cost-effective surveillance with 5 MPx resolution HD-TVI technology over existing coaxial cable. Ideal for new or existing projects, HD-TVI bullet cameras are quick and easy to install and can help users stay within budget constraints without compromising security needs.

With the ability to see in low-light conditions, HD-TVI Turret cameras provide color images by day and black-and-white images in night-time applications; in conjunction with IR illumination.

These cameras are specifically designed for use with TruVision HD-TVI DVRs that support 5MPx resolutions. Support for 5 MPx resolution is limited to specific BNC ports, based on the recorder. Refer to the TruVision HD-TVI recorder guidelines for more details. Please note that first generation TruVision HD-TVI DVRs will not support these cameras.



### Einzelheiten

---

- 5MPx HD-TVI resolution
- Motorized 2.8mm fixed lens
- HD-TVI technology for transmitting high quality video over existing coax cable
- TruVision over-the-coax support for efficient remote access to local camera OSD menu and lens configuration
- Digital Wide Dynamic Range (DWDR)
- Built-in IR-illuminators to cover low light scenes up to 20m, including Smart IR function to optimize IR illumination
- IP67 rating for optimal outdoor use
- Multiple mounting options, including Turret mounting plate
- Cable protection/management

# TVT-4403

## TruVision 5 MPX HD-TVI Turret camera, 2.8 mm fixed lens - NTSC

### Technische Spezifikationen

#### Allgemein

Technologie	HD-TVI analog
Videostandard	NTSC
Anzeigemodi	Spiegel
Video-Ausgang	BNC-Komposit

#### Kamera

Max. Auflösung	5 MPX
Sensor-Scan	Progressiv
Sensortyp	CMOS
Gesamtpixel (H x V)	2592 x 1944
Digitaler Signal/Rauschabstand	>62dB
Verschlusszeit	NTSC: 1/30 s to 1/50,000 s; PAL: 1/25 s to 1/50,000 s

#### Beleuchtungsleistung

WDR-Typ	Digitaler WDR
Tag / Nacht	Echt Tag / Nacht
Motorized IR Sperrfilter	Ja
S/W-Empfindlichkeit	0.01 lux @ f1.2 (AGC On); 0 lux with IR
Infrarot (IR)	Ja
IR-Bereich	20m

#### Codierung

Mainstream-Auflösungen	1920 x 1080 (1080p), 2592 x 1944
Max. Auflösung @ fps	2560 (H) x 1944 (V) @ 12.5 fps

#### Linse

Objektivtyp	Fest
Brennweite	2.8mm
Autofokus	Nein
Motorisierter Zoom	Nein

#### Video-Intelligenz

Videoanalyse	Fehler Pixelkorrektur, Smart IR
--------------	---------------------------------

#### Elektrische Angaben

Betriebsspannung	12VDC
Netzteil	12 VDC
Energieverbrauch	3W (Max.)
Aktueller Verbrauch	250mA

#### Physikalisch


Abmessungen	5 x 3.85 in. 126.7 x 97.84mm
Nettogewicht	0.77 lbs. 350g
Farbe	Grau (Pantone 428c)
Formfaktor	Turret

#### Umweltbedingungen

Vandalismussicher	Nein
Umgebung	Dringen, Draussen
Betriebstemperatur	-40° ~ 60° -40°F ~ 140°F
Kaltstart-Temperatur	-40° ~ 60° -40°F ~ 140°F
Relative Luftfeuchtigkeit	<90% (non-condensing)
IP Klassifizierung	IP67

#### Regulativ

Kompatibilität	CE, FCC, REACH, RoHS, UL, WEEE
----------------	--------------------------------

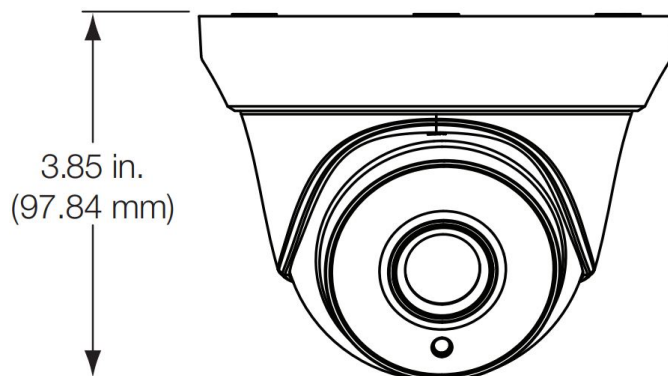

Als innovatives Unternehmen behält sich Kidde Global Solutions das Recht vor, Produktspezifikationen ohne Ankündigungen zu ändern. Für die aktuellsten Produktspezifikationen, besuchen Sie bitte [de.firesecurityproducts.com](http://de.firesecurityproducts.com) online oder kontaktieren Sie bitte unsere Vertriebsmitarbeiter.