
2010-2A-ZI-24-S

Addressable fire panel component, LED indicator, 24 zones

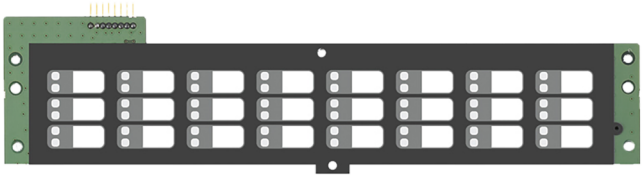

Details

- Addressable fire panel component, LED indicator, 24 zone
- Suitable for small panel 2X-A and ZP2-A series

2010-2A-ZI-24-S

Addressable fire panel component, LED indicator, 24 zones

Technical specifications

Zone

Maximum zone capacity	up to 24

Physical

Form factor	Small
Physical dimensions	190 x 60 x 320 mm (W x H x D)
Net weight	55 g
Shipping weight	200 g
Mounting type	In cabinet

Regulatory

Compliancy	CPD, RoHS, WEEE
Certification	EN54-2, EN54-4

KIDDE COMMERCIAL

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 19 March 2026 - 16:45