584503-W

Wireless 3V ShatterPro II with "Pattern Recognition Technology" 360' 7.5m radius range



584503-W

Wireless 3V ShatterPro II with "Pattern Recognition Technology" 360' 7.5m radius range

Technical specifications

General

Technology	Acoustic
Glass types	Laminated, Plate, Tempered, Wired
Range	6m radius
Tamper switch	Yes

Wired / wireless

Wired / wireless	Wireless

Electrical


Operating voltage	2.8 to 4.5 VDC
Power supply value	2.8 to 4.5 VDC
Power consumption	17µA typical
Current consumption	17µA typical

Physical

Physical dimensions	108 x 80 x 43 mm
Colour	White
Mounting type	Surface mount

Environmental

Operating temperature	-10° to +50° C

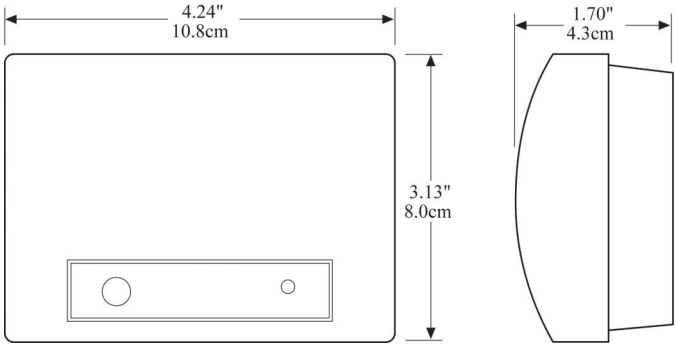

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 6 October 2026 - 13:07