AD044

Pinpoint, Aritech only, 4I40-ID



Details

- 2/4 wire external interface
- Four inputs to monitor non-adressable devices
- Four outputs
- If needed powered through auxiliary power supply
- Used for any sensor

AD044

Pinpoint, Aritech only, 4I40-ID

Technical specifications

General

Accessory group	Motion sensors
Type	Module
Address range	0 to 255
Unit load for DGP	1

Electrical

Power supply type	VDC
Operating voltage	12 VDC 24 VDC
Current consumption	500 mA
Bus protocol	Interlogix property
Bus voltage	12 VDC or 24 VDC
External power supply	9 to 13.8 VDC
Current consumption from Bus	290 microA

Physical


Physical dimensions	173 x 122 x 51 mm
Colour	White

Environmental

Operating temperature	0 to 55°C
Relative humidity	max. 90%
Environment	Indoor

Output

Open collector current output	100 microA max.
Output current	500 mA max. each

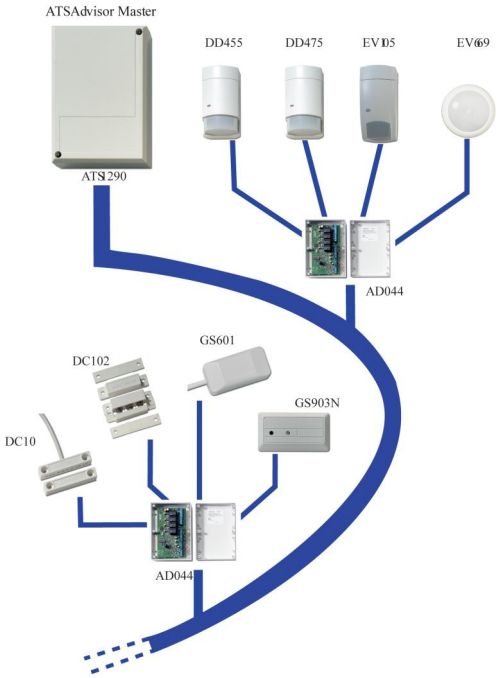

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 6 May 2026 - 15:54