
AD1000X10

Plug-in module EV/VE/DD1000 (10-pack)

The AD1000 IADS module is supported by the ATS1290N DGP, and designed to be installed directly on the terminal block of the following detectors: EV1000 series / VE1000 series / DD1000 series (standard as well as AM variants).

A 3 core connection only is required to the ATS1290N DGP / ATS Master panel.

As the AD1000 acts as I/O interfaces with one dual-zone input and two outputs, it is necessary to program anti-masking detectors to signal a technical fault or
antimasking condition to the alarm output.

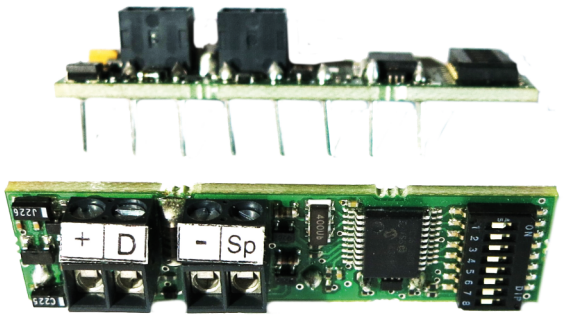

Details

- Helps reduce installation time
- Up to 32 addresses can be set
- Fits into motion sensor connector block
- Supported by ATS1290N DGP

AD1000X10

Plug-in module EV/VE/DD1000 (10-pack)

Technical specifications

General

Accessory group	Motion sensors
Type	Module
Device type / Category	T3 / PIR
Address range	0 to 31

Electrical

Operating voltage	9 to 24 VDC (12 V nominal)
Current consumption	200 mA (Max. current capacity output day/night) 200 mA (Max. current capacity output walk test) 900 µA @ 13.4 VDC (Maximum) 400 µA @ 13.4 VDC (Minimum) approx. 75 µA (Out of bus)
IADS-bus voltage	12 or 24 VDC

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 18 June 2026 - 14:24