
AD111

Internal addressable device interface

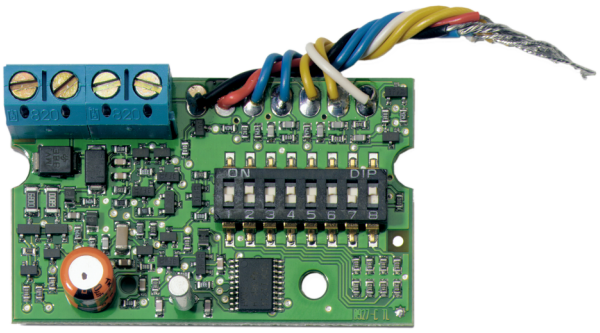

Details

- 2/4 wire internal interface
- Two inputs to monitor alarm and tamper relay
- One output to trigger the LED
- If needed powered through auxiliary power supply
- Fit to EV125/425 & 500 series

AD111

Internal addressable device interface

Technical specifications

General

Accessory group	Motion sensors
Type	Module

Electrical

Operating voltage	12 / 24 VDC
Current consumption	330 µA +/-10% from bus

Physical

Physical dimensions	30 x 50 x 12 mm (W x H x D)

Environmental

Environment	Indoor

Bus protocol

	Interlogix property

External power supply

	9 to 13.8 VDC

Unit load for DGP


	1

Address range

	0 to 255

Open collector current output

	100 microA max.

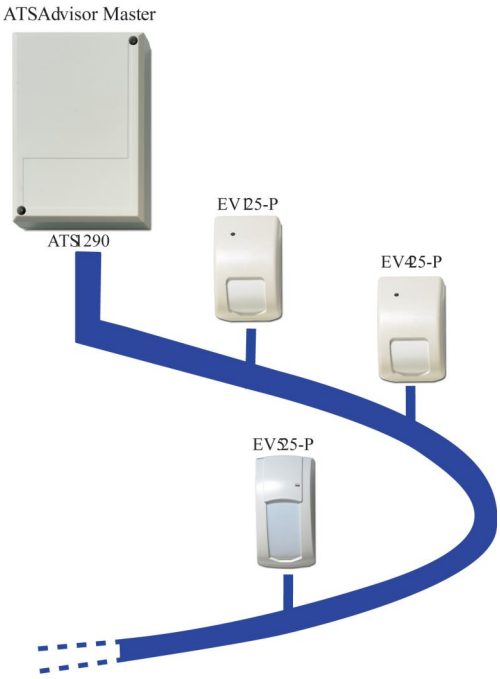

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 18 June 2026 - 14:24