
ATS1483

ATS118x to Unsecure Mode

Product Overview

The ATS1483 ATS118x to Unsecure Mode configuration card allow to configure the ATS1180 or ATS1181 to ATS1160/61N Mifare reader mode (unsecure mode) without any programming device or menu configuration.

The configuration card has to be applied when the reader is not online.

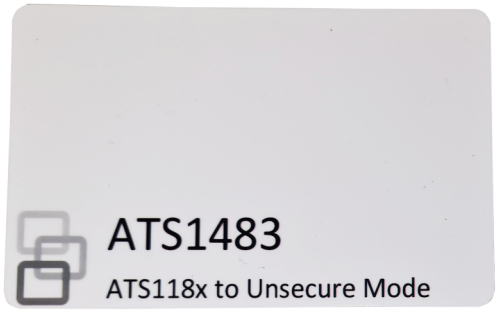

Details

- When applied configures ATS1180/ATS1181 to ATS1160N/ATS1161N mode
- Apply when reader not online

ATS1483

ATS118x to Unsecure Mode

Technical specifications

System

Reading distance	min 1 cm
Custom data model	No
Supported readers	ATS ATS118x Secure Readers

Technology

Credential type	Configuration card, Smart card
Credential driftsfrekvens	13.56 MHz

Printing

Direct surface printing	Yes

Ordering information

Minimum order quantity	1
Cards / tags in package	1

Physical

Material	PVC
Form factor	CR80 (Credit)
Physical dimensions	86 x 54 mm
Colour	White
Card Label	Programming Card

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 18 June 2026 - 15:13