
ATS626

Plug-in output expander, 16-way

Sixteen way plug-in output expander

The ATS626 offers a 16-way output expansion to Axon and Advisor Advanced panels. To reduce required space in the Main control panel housing, the unit is a plug-in to the Main Control panel PCB.
The ATS626 provides for eight Open Collector outputs available through screw terminals, one being a high-current output. In addition, it provides for eight open collector outputs through flying leads or as a relay when using ATS1810 four way relay cards. The output function is defined through the output configuration in the main control panel.

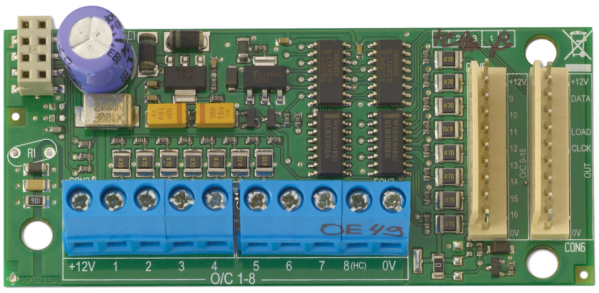

Details

- Expand Axon and Advisor Advanced panels with 8-open collector outputs on the PCB
- Expand with max 8-relay outputs using 2 x ATS1810 4-way relay card
- 1 high current output (1A)
- Open collector output max 50 mA
- Plug-in to Axon and Advisor Advanced panels

ATS626
Plug-in output expander, 16-way

Technical specifications

General

Expander type	Output expander
Product line	Advisor Advanced, Axon
Connection type	Plug-in
Max. distance from panel	Located on the panel PCB
Max. per panel	1

Outputs

Total	16
Onboard	8
Expandable	8 (2x ATS1810)
Type uitgangen	Open collector

Electrical

Operating voltage	10.5 to 13.8 VDC
Current consumption	50 mA (Low current OC) 1 A (High current OC)

Physical

Physical dimensions	90 x 40 mm

Environmental

Operating temperature	0 to +50°C
Relative humidity	95% noncondensing
Environment	EN50130-5 ; Class II - Indoor (general)

Regulatory

Compliancy	CE
Certification	CE, EN50131 Grade 3, VdS

Compatible products

Category	Reference	Description
Control Panel	ATS1700-MBC	
Control Panel	ATS1700-MM	
Control Panel	ATS3700-MBC	
Control Panel	ATS3700-MM	

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 18 June 2026 - 14:25