
DC114

Adjustable plunger switch

Recessed Pin Plunger

The DC114 pin plunger is used for tamper protection. The contact is hermetically sealed and the reed is actuated for positive operation on seldom-used enclosure openings.

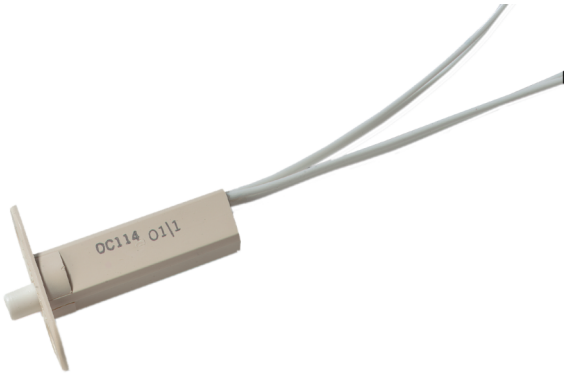

Details

- Adjustable plunger depth
- Including sheet metal mounting screws
- Easy installation
- Standard 2 m wire length
- Tamper loop provided

DC114
Adjustable plunger switch

Technical specifications

General


Application type	Recessed mount
Contact type	NC
Connectivity	4 wires, 2 m

Wired / wireless

Wired / wireless	Wired

Physical

Physical dimensions	12 x 42 mm (Ø x L)
Colour	Beige

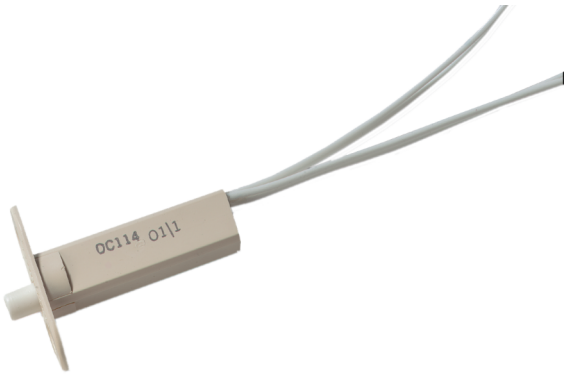

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 13 August 2026 - 11:05