DC121S60


CONTACT 6 METERS VdS CABLE

Press-Fit Contact

The DC121 press fit switch is an 11 mm diameter magnetic contact with wire leads. Use no glue or screws to mount; small ribs on the housing hold the contact in place. Heavy-duty housing resist crushing from swelling wood. An extra wide gap version, DC127, is available for applications that may be prone to false alarms caused by loose fitting doors. The DC222 is a variant with a change-over contact type.

Applications

For recessed applications, either indoor or outdoor. Also useful in protecting china cabinets or closets, double-hung windows and aluminium windows.

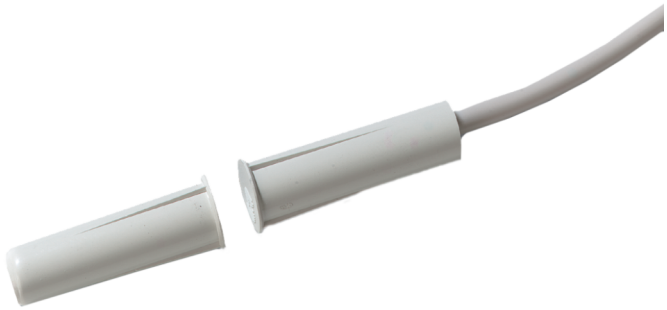

Details

- 11 mm press-fit mounting; no screws or glue needed
- Attractive, added security of recessed installation
- Heavy-duty housing resists crushing
- Available in different cable lengths
- Tamper loop provided

DC121S60
CONTACT 6 METERS VdS CABLE

Technical specifications

General


Application type	Recessed mount
Contact type	NC
Connectivity	4 wires, 6 m

Wired / wireless

Wired / wireless	Wired
Operating gap	12 mm max.

Physical

Physical dimensions	11 x 33 mm (Ø x L)
Borehole diameter	9mm

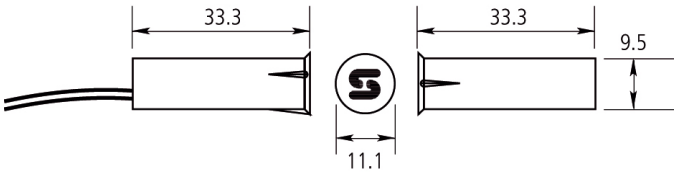

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 13 August 2026 - 11:05