KE-DM3110R-KITF

Excellence Series intelligent addressable manual call point with isolator and back box & flip cover

Product overview

The KE-DM3100 Series is an intelligent range of addressable, Excellence Series manual call points with integrated isolation. The KE-DM3110R-KITF is a red, single action indoor MCP with a House-on-Fire functional indicator. It is delivered complete with back box, protection flip cover, resettable element, test connector and test key. Multiple optional accessories are available to facilitate most indoor installation requirements.

Aesthetics

This single action MCP is a standard profile, indoor MCP suitable for surface mount installations using standard back box. With its designer dual, tricolour LEDs it offers 180°, clear local indication of its operational status, even from a side view in a passage installation and with the flip cover installed. The clean face of the MCP is further enhanced by a front access & test key facility which is accessible without adjustment to the flip cover.

Installation & maintenance friendly

The front facing access for an aesthetically matching test key allows unhindered access regardless of the installation location. The MCP key doubles as a test and disassembly tool allowing removal of the MCP front cover without the need for additional tools.

Compatibility

The KE-DM3000 range may be used on all Kidde Excellence Series fire systems, and are also compatible with legacy Aritech fire systems. They can in many cases be deployed into existing systems without CIE configuration changes.



Details

- Reliable single action manual call point for surface mounting
- Integrated short circuit isolation for added safety
- Dual, tri-colour status indicators offers 180° alarm visibility
- Tamper resistant design with resettable or optional frangible element
- Unobtrusive front facing test facility
- Standard mounting options facilitates easy retrofitting to existing installations
- Matching back box with rear, top and bottom cable entry
- Screen connection terminal in the back box for electrically noisy installations
- Pluggable connector with link through facility for ease of installation and pre-commissioning testing
- An alarm flag on the face of the manual call point allows alarm indication even without alarm LEDs
- Fast, no-tools-required maintenance using the test key
- Flip cover with breakable seal for protection against accidental activation
- Up to 128 devices supported per loop

KE-DM3110R-KITF

Excellence Series intelligent addressable manual call point with isolator and back box & flip cover

Technical specifications

General

Status indication	Dual LEDs, Alarm (red constant), Isolated (yellow constant), Fault (yellow blinking), Communication (green blinking)
User interface	LEDs, alarm flag
Compatibility	Excellence and legacy Aritech series fire systems
Connectivity	2-wire loop
Addressing method	DIP Switches

Electrical

Power supply type	Loop powered
Operating voltage	17 to 29 VDC
Communication voltage	4 to 11 V pulsed
Current consumption	200 µA (quiescent) 2.8 mA (alarm)
Cable specification	0.404 to 2.05 mm (0.13 to 3.31 mm²)
No. of cable cores	2
Terminals	4 (A+/A-;B+/B-)

Detection

Detection principle	Push button/switch
Monitoring	Activated, Fault, Off, Short circuit
Response time	< 3 s
Installation height	Determined by local regulation

Isolation

Type	Negative line break
Quantity per loop	≤128
Isolation voltage	14 to 15.5 VDC
Reconnect voltage	14 to 15.5 VDC
Loop current	1 A (Continuous)
Switch current	1 A (Pulsed)
Leakage current	<1 mA
Series resistance	<0.06 Ω
Impedance requirements	<32 devices between isolators

Physical

Physical dimensions	87 × 87 × 26 mm (without back box) 87 × 87× 57 mm (with back box) 109 x 94 x 81 mm (with back box & flip cover)
Net weight	110 g (without back box) 165 g (with back box) 225 g (with back box & flip cover)
Colour	Red (RAL 3028)
Mounting type	Back box, Wall mount
Cable entries	4 (3 side, 1 rear)
Material (body)	Flame retardent ABS
Functional marking	House on Fire

Environmental


Vandal proof	No
Operating temperature	−25 to +72°C
Storage temperature	−25 to +72°C
Relative humidity	10 to 95% noncondensing
Environment	Indoor
IP rating	IP41

Regulatory

Compliancy	CE, REACH, RoHS 3, WEEE
Certification	CPR
Standards	EN54:11, EN54:17

Compatible products

Category	Reference	Description
Detection device	N-MC-BS	
Detection device	N-MC-FE	

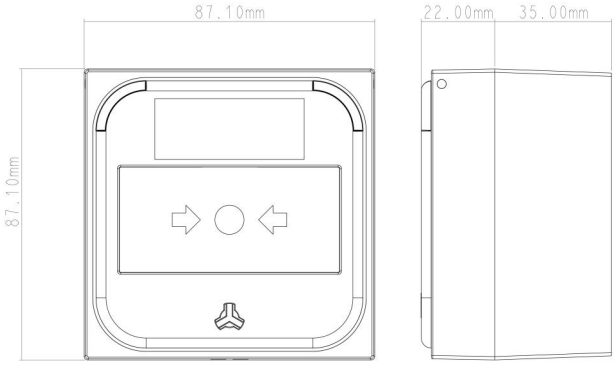

KIDDE COMMERCIAL

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 11 August 2026 - 14:24