NP-25

Device suspension bracket, 25 cm



General

The NP series brackets provide an easy and suitable mounting platform solution for the installation of detection points away for the ceiling when direct mounting on the ceiling is not desired or permissible. The NP-25 antistatic and corrosion-proof glass fibre and polyester bracket offers a suitable installation platform for point detectors for requirements of ceiling heights between 6 and 14 m.

Application

Detector placement in areas with high, flat or nearly flat roofs may in some cases require that the detector is not mounted flat on the ceiling itself to overcome air pockets preventing fire phenomena such as smoke or heat from reaching the detector. The NP series brackets distance the detector from the ceiling allowing these phenomena to reach the detection point more easily.

Recommended Practises

The table from the Swedish Fire Association (norm SBF 110:6) is included below, indicating the required distance that the detector needs to be away from the ceiling in relation to the ceiling height.

Optional

For additional extention the R-100 extends the range to 100cm.

Details

- Easy to install
- Anti-static and corrosion proof
- Overcomes air pocketing and buffeting effects on flat ceilings

NP-25

Device suspension bracket, 25 cm

Technical specifications

Physical


Physical dimensions	250 x 97 mm
Net weight	280 g
Material (body)	Fiberglass, Polyester


Environmental

Environment	Indoor

Regulatory

Standards	UL94 (Fire Resistance)

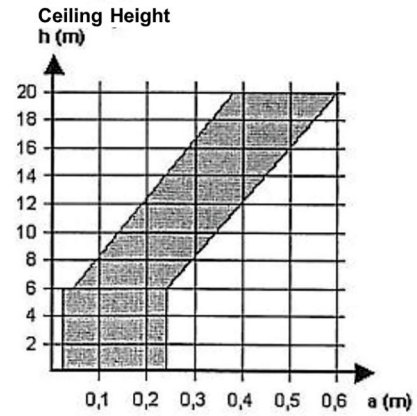



KIDDE GLOBAL SOLUTIONS

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 27 September 2024 - 11:14