
RK100-N

Bolt contact for mounting on interior doors

The bolt contact is suitable for mounting at the door closing plate to allow the lock detection of the corresponding lock device. This product is only to be used for indoor applications. The activation/operation of the bolt contact is triggered by the lock bolt. The status of the bolt contact can be processed by the central unit of an intruder and hold-up system.

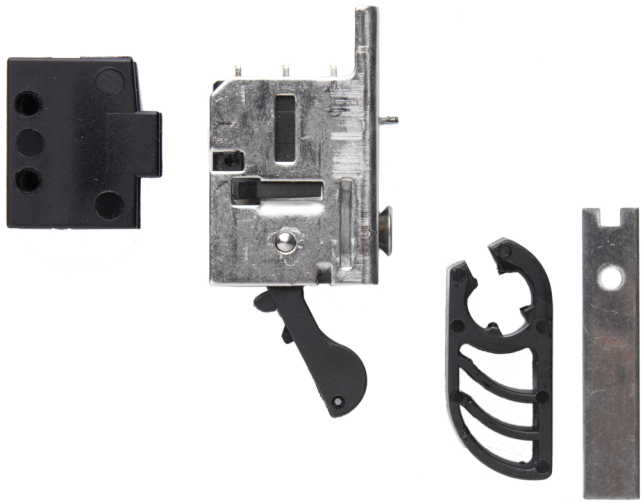

Details

- For mounting on interior doors
- IP50
- VdS Class C certified
- 2,5 years warranty

RK100-N

Bolt contact for mounting on interior doors

Technical specifications

General

Accessory group	Door lock accessories
Type	Spare part

Electrical

Operating voltage	max. 30 VDC (switch voltage)
Current consumption	min. 5 mA, max. 300 mA (switch current)

Environmental

Operating temperature	-25 to +70°C (at fixed cable) -5 to +50°C (at moveable cable)
Environment	Indoor
IP rating	IP50

Regulatory

Certification	VdS
Security approvals	VdS Class II

Contact

Termination	3 soldered terminals
Capacity	Max. 3 W/VA
Type	Change over

Switch Point

	Adjustable
Cycles of operation	min. 30.000

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 14 July 2026 - 14:37