SH-51-0100-0001-99


SmartCell Fire Manual Call Point

Overview

The SmartCell Call Point is quick and easy to install and offers individual addressing at the Excellence Control Panel or Gateway.

Features include a protective transparent cover, bidirectional 868 MHz communication, fire indication LED and an anti-tamper locking mechanism.

This device is third party certified and compatible with the Excellence wireless gateway.

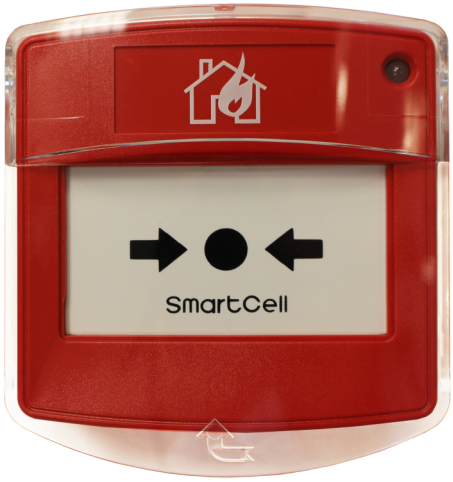

Details

- Quick and easy to install
- Compact enclosure
- Includes protective transparent cover
- Unique design
- Inbuilt locking mechanism

SH-51-0100-0001-99

SmartCell Fire Manual Call Point

Technical specifications

General

Status indication	LED
Wireless frequency	868 MHz
Compatibility	Excellence Gateway

Electrical

Batteries	2 x 3.6 V lithium thionyl chloride batteries Fanso: ER14505M HCB: ER14505M (HCB-JS-TZ-02-547)

Physical

Physical dimensions	92 x 97 x 47 mm (W x H x D)
Net weight	0.2 kg
Colour	Red
Mounting type	Wall mount

Environmental

Operating temperature	-10 to +55°C
Storage temperature	-10 to +55°C (without batteries)
Relative humidity	95% noncondensing max.
Environment	Indoor

Regulatory

Compliancy	CE, REACH, RED (2014/53/EU), RoHS 3, WEEE
Certification	CPR
Standards	EN54-11 EN54-13 EN54-25

Compatible products

Category	Reference	Description
Batteries	SH-836-000	
Interface unit	SH-14-3201-000 1-99	
Test Equipment	SH-51-BASE-010 0	

KIDDE COMMERCIAL

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 24 April 2026 - 14:50