
VM602P

Recess mounting box, wall

Recess mounting

The VM602P is a recess mounting box to be used when the seismic detector is mounted in concrete walls under construction. For recess mounting in floors, you should use the floor mounting box VM611P with extra strong lid.

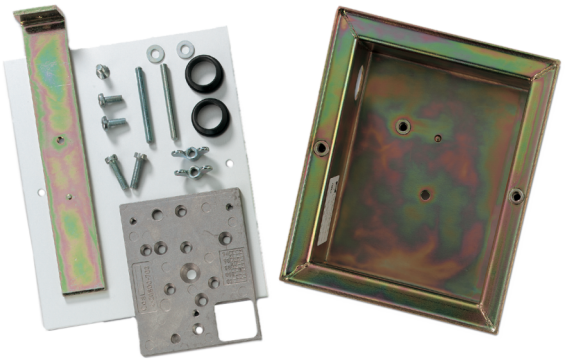

VM602P

Recess mounting box, wall

Technical specifications

General

Accessory group	Seismic sensors
Type	Mounting

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 18 June 2026 - 14:33