
WC106W

Shielded Composite 2 + 4 Cable 2 x 0.75

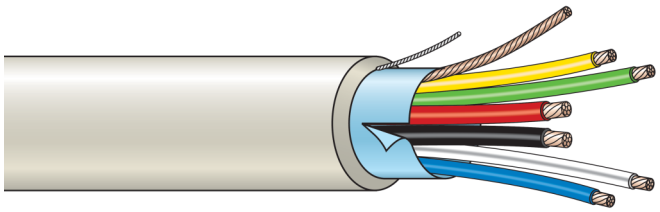

Details

- For internal or external wiring of warning network systems
- Manufactured in accordance with BS4737 section 3.30
- Suitable for gluing to surfaces
- High quality PVC

WC106W

Shielded Composite 2 + 4 Cable 2 x 0.75

Technical specifications

Shielding

Shielded	Yes

Core

Conductor size	0.22 mm² (data) - 0.75 mm² (power)
Conductor material	Plain copper
Wire colours	Red, Black (power) Blue, White, Yellow, Green (data)

Jacket

Jacket colour	White
Jacket thickness	Min. 0.45 mm2 - max. 0.7 mm2

Electrical characteristics

Current rating	1 A
Max. conductor DC resistance	92.4 ohm/km @ +20°C
Nominal (mutual) capacitance	90 pF/m

Physical

Cable length	100 m
No. of wires	6

Environmental

Halogen free	No

Regulatory

Compliancy	CE

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 18 June 2026 - 14:33