
WS108W-HF-N

Shielded Cable White 8X7/0,2 mm - Halogen free - Cca grade- 500 m rolls

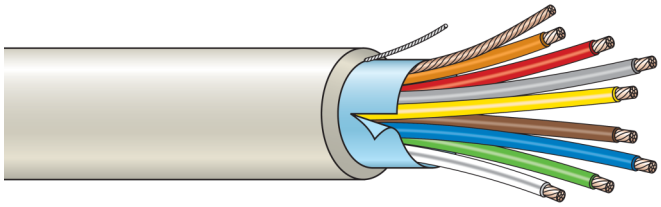

Details

- For internal or external wiring of warning network systems
- Halogen free and CCa graded
- Suitable for gluing to surfaces

WS108W-HF-N

Shielded Cable White 8X7/0,2 mm - Halogen free - Cca grade- 500 m rolls

Technical specifications

Shielding

Shielded	Yes

Core

Conductor size	0.22 mm²
Conductor material	Plain copper
Wire colours	Yellow, Green, Blue, White, Brown, Grey, Red, Orange, Light blue

Jacket

Jacket colour	White
Jacket thickness	Min. 0.22 mm - max. 0.7 mm

Electrical characteristics

Current rating	1A
Max. conductor DC resistance	<122 ohm/km at +20°C
Nominal (mutual) capacitance	250 pF/m

Physical

Cable length	500 m
No. of wires	8

Environmental

Halogen free	Yes

Regulatory

Compliancy	CE
Standards	CPR class CCA

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 31 August 2023 - 15:44