



MC352-1P/1S

Gigabit Ethernet to SFP Industrial Media Converter

Overview

These IFS Gigabit Ethernet to SFP Industrial Media Converters are designed for the most demanding IP network applications offering the flexibility of SFP technology and wide operating temperature range. The MC352-1P/1S model provides full IEEE802.3-at (30w) PoE and serves as a PSE device.

SFP Technology

These models convert 10/100/1000Base-T Ethernet on copper to 1000Base-X fiber via Small Form-factor Pluggable (SFP) technology. These media converters can be custom configured to your exact system design specifications by utilizing a variety of IFS SFP Mini-GBIC modules. IFS SFP Mini-GBIC modules are available in a variety of versions from multi-mode or single mode fiber, 1 or 2 fibers and wide-temperature versions.



Details

- 10/100/1000 Base-SX/BX/LX/LHX/ZX and 100 Base-FX/BX/LX
- 10/100Base-TX: 2-pair Cat. 5e/6 UTP cable, up to 100 meters
- 1 SFP slot provides custom configuration
- Optical fiber and distance varies by SFP (ordered separately)
- Plug-n-play installation
- Slim IP30 metal enclosure
- DIN-rail or wall-mounting
- 24 to 48 VDC with redundant power with reverse-polarity protection
- Alarm relay output for port breakdown and power-failure alert
- Complies with IEC60068-2-xx standards for free-fall, shock and vibration
- Wide operating temperature range of -40°C ~ +75°C
- Power over Ethernet
- Complies with IEEE 802.3at
- Inserts 52VDC (30w) power on Category network cable
- Protects non-PoE devices if accidentally connected
- Backwards compatible with IEEE802.3af

MC352-1P/1S

Gigabit Ethernet to SFP Industrial Media Converter

Technical specifications

General

Category	Industrial
Type	Ethernet to SFP
Switch throughput (Mpps)	14.8
Fault relay output	Yes

Connections

No. of ports	1
Port speed	Gigabit
Port type	10/100/1000
Fiber port	1
Fiber port type	SFP
Fiber port speed	1000Base SX/BX/LX/LHX/ZX or 100Base FX/LX/BX
Supported SFPs	S20/S25 series, S30/S35 series
Fiber distance	SFP dependant
Fiber connector	LC
Wavelength	SFP dependant

Electrical

Power supply type	24 to 48 VDC
Power consumption	33 W
Current consumption	1.4 A
PoE	Yes
PoE / PoE+	1 port PoE+ (802.3at)
Redundant power	Yes

Physical

Physical dimensions	32 x 87 x 135 mm (H x W x D) 5.31 x 3.34 x 1.25 in.
Net weight	500 g 1.2 lbs.
Material	Metal
Mounting type	DIN-rail, Wall mount

Environmental

Operating temperature	-40 to +75°C
Storage temperature	-40 to +85°C
Relative humidity	5 to 90% noncondensing
IP rating	IP30
MTBF	>50,000 h @ 25°C

Ethernet

Data Rate	100 Base-FX/BX/LX and 1000Base-SX/BX/LX/LHX/ZX
Throughput (packet per second)	1,488,000pps
Switch Architecture	Store-and-forward
Jumbo Packet Size	9 K
Flow Control	Back Pressure for Half Duplex, Mode Pause for Full-Duplex Mode IEEE 802.3x
Connector	RJ-45 (Auto-MDI/MDI-X)
Cable Type and Distance	10 Base-T: 2-pair UTP Cat. 3,4,5, up to 100 m (328 ft.) / 100Base-TX: 2-pair UTP Cat. 5e, up to 100 m (328 ft.) / 1000 Base-T: 4-pair UTP Cat. 5e, 6 up to 100m (328 ft.)

Fiber

Data Rate	1000 Base-SX/LX/BX 802.3z
Connector	SFP (Mini-GBIC) port
Fiber Type and Distance	Varies by SFP module

LED Indicators & Controls


Power/Status	Green/On - power
10/100/1000Base-TX port	Green/On - active port (TX/RX), Amber/On - PoE in-use
SFP (Mini-GBIC) port link	Green/On - link established
Reset button	Reset to factory default settings

Standards Compliance

IEEE	IEEE 802.3 10Base-T / IEEE 802.3u 100Base-TX / 100Base-FX / IEEE 802.3ab 1000Base-TX / IEEE 802.3z 1000Base-SX/LX/BX / IEEE / 02.3Q VLAN Tagging / IEEE 802.3x Flow Control and Back Pressure / IEEE 802.3p Class of Service
EMI	EN 55022 CLASS A / EN61000-3-2:2006 / EN61000-3-3: 1995+1A:2001+A2:2005
EMS	EN 55024:1998+A1:2001+A2:2003 / IEC 61000-4-2:2001 / IEC 61000-4-3:2008 / IEC 61000-4-4:2004 / IEC 61000-4-5:2005 / IEC 61000-4-6:2008 / IEC 61000-4-8:2001

Compatible products

Category	Reference	Description
Power Supplies	PS48VDC100W-DIN	

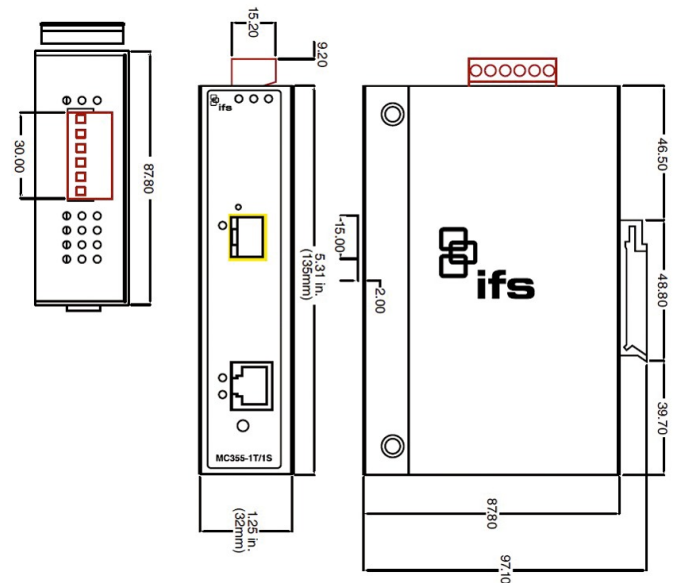

As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 17 January 2024 - 13:59