


# ATS1500A-IP-MM-MK

Kit ATS1500A-IP-MM including ATS1136 secure MF keypad

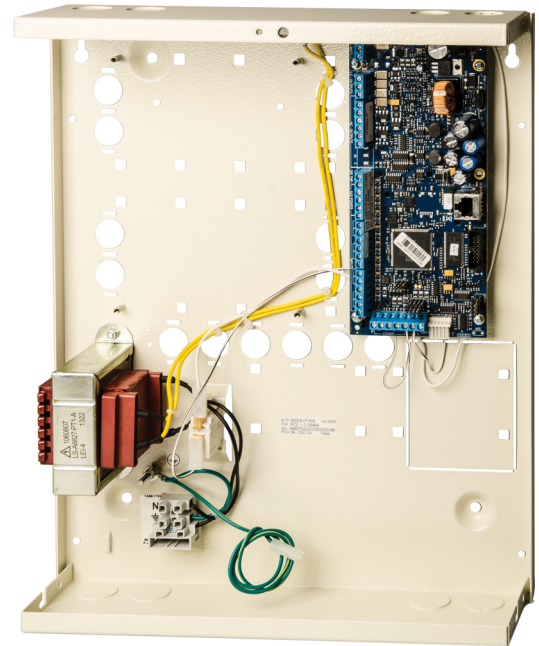

## Details

---

- 8 onboard zone inputs
- Max 32 zones: wired, wireless or mixed
- Economic input and output plug-in expansion
- Up to 16 shock sensor inputs
- 4 areas
- Up to 50 users
- EN50131 Grade 3 (when ATS-MM-TK added) / Environmental class 2
- USB port for local configuration
- Plug-on PSTN dialler for reporting or configuration
- Multilingual: language configurable per user
- Integrated 10/100Mb Ethernet connection
- IP alarm reporting to OH-NETREC receiver - Optional GPRS
- Integrated access control & support for ATS125x door controller
- Including ATS1136 Secure Mifare Desfire EV1 keypad

# ATS1500A-IP-MM-MK

## Kit ATS1500A-IP-MM including ATS1136 secure MF keypad

### Technical specifications

#### System

Product line	Advisor Advanced
Product type	Integrated Access Control
Panel type	Hybrid
Kit	Yes
No. of keypads / readers	8
Data Gathering Panels (DGP)	7
No. of alarm groups	16
Specified cable	WCAT52 WCAT54

#### Inputs

Max. no. of inputs	32
Onboard inputs	8
Inputs plug-in expansion	8

#### Outputs

No. of outputs	128
No. of onboard outputs	5

#### Area

No. of areas	4
--------------	---

#### User / cards

Max. no. of users	more than 2000
Max. no. of cards	50
Max. no. of PIN codes	50

#### Access control

Standard doors on control panel	4
Door groups	128
Intelligent doors on 4-door DGPs	28

#### Communication

Onboard transmission type	IP
Transmission extension	GSM, GSM/GPRS, GSM/GPRS/IP, PSTN
Databus type	RS485

#### Event log

Access event log	10000
------------------	-------

#### Electrical

Power supply type	230 VAC
Power supply value	230 VAC +10%, -15%, 50 Hz
Mainboard current consumption	150 mA
Max. system current	950 mA at 13.8 V $\pm$ 0.2 V
Max. aux power current	840 mA
Auto-reset fuses	5
Glass break fuses	1

#### Physical

Physical dimensions	315 × 388 × 85 mm
Material	Steel (painted)
Housing	Medium metal

#### Environmental

Operating temperature	-10 to +55°C
Relative humidity	95% (non-condensing)
Environmental Class	Class II, indoor
IP rating	30

#### Regulatory

EN50131 Grade	Grade 3, with tamper kit
Compliance	CE



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit [firesecurityproducts.com](http://firesecurityproducts.com) online or contact your sales representative.

Last updated on 5 May 2023 - 10:33