


# ATS1500A-KIT-6-NG

Kit ATS1500A-MM including TDA7400NG 3G communication module

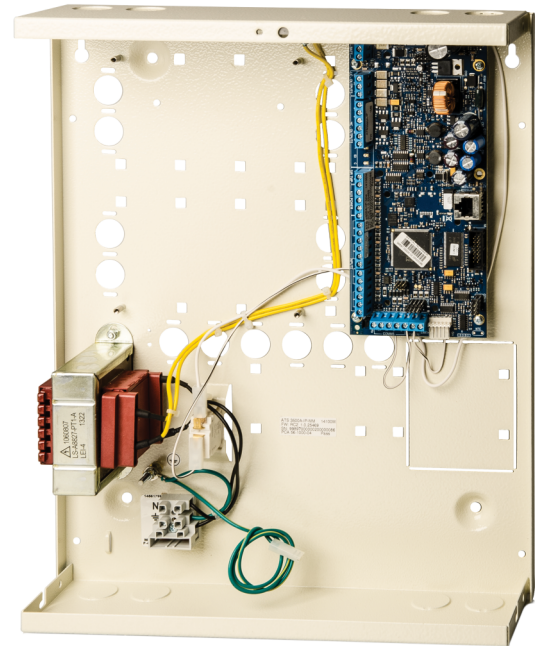

## Details

---

- 8 onboard zone inputs
- Max 32 zones: wired, wireless or mixed
- Economic input and output plug-in expansion
- Up to 16 shock sensor inputs
- 4 areas
- Up to 50 users
- EN50131 Grade 3 (when ATS-MM-TK added) / Environmental class 2
- USB port for local configuration
- Plug-on PSTN dialler for reporting or configuration
- Multilingual: language configurable per user
- Integrated 10/100Mb Ethernet connection
- IP alarm reporting to OH-NETREC receiver - Optional GPRS
- Integrated access control & support for ATS125x door controller

# ATS1500A-KIT-6-NG

## Kit ATS1500A-MM including TDA7400NG 3G communication module

### Technical specifications

#### System

|                             |                           |
|-----------------------------|---------------------------|
| Product line                | Advisor Advanced          |
| Product type                | Integrated Access Control |
| Panel type                  | Hybrid                    |
| Kit                         | Yes                       |
| No. of keypads / readers    | 8                         |
| Data Gathering Panels (DGP) | 7                         |
| No. of alarm groups         | 16                        |
| Specified cable             | WCAT52<br>WCAT54          |

#### Inputs

|                          |    |
|--------------------------|----|
| Max. no. of inputs       | 32 |
| Onboard inputs           | 8  |
| Inputs plug-in expansion | 8  |

#### Outputs

|                        |     |
|------------------------|-----|
| No. of outputs         | 128 |
| No. of onboard outputs | 5   |

#### Area

|              |   |
|--------------|---|
| No. of areas | 4 |
|--------------|---|

#### User / cards

|                       |                |
|-----------------------|----------------|
| Max. no. of users     | more than 2000 |
| Max. no. of cards     | 50             |
| Max. no. of PIN codes | 50             |

#### Access control

|                                  |     |
|----------------------------------|-----|
| Standard doors on control panel  | 4   |
| Door groups                      | 128 |
| Intelligent doors on 4-door DGPs | 28  |

#### Communication

|                           |                            |
|---------------------------|----------------------------|
| Onboard transmission type | PSTN                       |
| Transmission extension    | GSM, GSM/GPRS, GSM/GPRS/IP |
| Databus type              | RS485                      |

#### Event log

|                  |          |
|------------------|----------|
| Alarm event log  | 250-1000 |
| Access event log | 10000    |

#### Electrical

|                               |                              |
|-------------------------------|------------------------------|
| Power supply type             | 230 VAC                      |
| Power supply value            | 230 VAC +10%, -15%, 50 Hz    |
| Mainboard current consumption | 150 mA                       |
| Max. system current           | 950 mA at 13.8 V $\pm$ 0.2 V |
| Max. aux power current        | 840 mA                       |
| Auto-reset fuses              | 5                            |
| Glass break fuses             | 1                            |

#### Physical

|                     |                   |
|---------------------|-------------------|
| Physical dimensions | 315 × 388 × 85 mm |
| Material            | Steel (painted)   |
| Housing             | Medium metal      |

#### Environmental

|                       |                   |
|-----------------------|-------------------|
| Operating temperature | -10 to +55°C      |
| Relative humidity     | 95% noncondensing |
| Environmental Class   | Class II, indoor  |
| IP rating             | 30                |

#### Regulatory

|               |                          |
|---------------|--------------------------|
| EN50131 Grade | Grade 3, with tamper kit |
| Compliance    | CE                       |



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit [firesecurityproducts.com](http://firesecurityproducts.com) online or contact your sales representative.

Last updated on 5 May 2023 - 9:36