

IO956I

950 Series Sounder Circuit Controller with Isolator (Surface Mount)

General

The IO956I is an addressable sounder controller. It is designed to control sounders powered by an external DC supply. Sounders are switched continuously or pulsed, and may be synchronised.

Interfaces for intelligent systems

The IO956I is designed to suit individual applications. This standard interface is designed to be surface mounted to walls and consist of three parts: a back box with knockouts for cable entry, a PCB assembly and a protective front cover.


Interface with isolator

The IO956I is fitted with a bi-directional short-circuit isolator so that they are unaffected by a single short-circuit on either loop input or output.

Sounder Control

The IO956 is normally used to control a zone of sounders powered by an external DC supply. The sounders will be switched to sound continuously or be pulsed, 1s on, 1s off.

An opto-coupled input is provided to monitor the state of the external power supply.

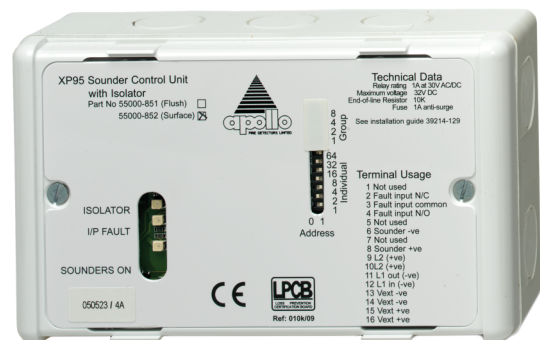

Details

- LEDs for signalling of I/O and fault condition
- Aesthetically pleasing
- On board loop isolators
- Easy to install
- Well protected
- Modular design

|0956|

950 Series Sounder Circuit Controller with Isolator (Surface Mount)

Technical specifications

Electrical

Operating voltage 17 to 28 VDC

Current consumption 1.9 mA

Physical

Colour White

Environmental

Operating temperature -20 to +70°C

Relative humidity 0 to 95% noncondensing

Environment Indoor

IP rating IP54

Regulatory

Certification EN54-17, EN54-18



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 18 April 2024 - 17:05