



# ATS7320-SIM


**GSM module for reporting and U/D, SIM card included**

## **ATS7320-SIM - UltraSync**

---

ATS7320-SIM is an ATS7320 GSM module with a preinstalled UltraSync SIM card. This module and its SIM card can be used for UltraSync functionality only when the panel is registered in the UltraSync portal.

The ATS7320-SIM is to be used with ATsx500A panel series (firmware version 4.0.xxxx or higher).

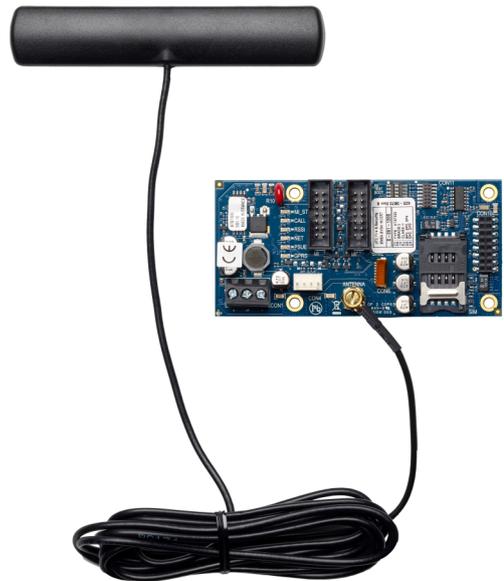

## **Details**

---

- Full UltraSync alarm reporting via GSM
- To be used in combination with the Advisor Advanced ATsx500A panel series
- Data connection for Up/Download when connected to Advisor Advanced
- Unique 4800 Baud data connection for U/D
- Wireless operating frequencies: GSM 850, E-GSM 900, DCS 1800, PCS 1900
- Six status LED's for diagnostics
- GSM Antenna included

# ATS7320-SIM

GSM module for reporting and U/D, SIM card included

## Technical specifications

---

### General

Product line	Advisor Advanced, UltraSync
Configuration	Supported panels: ATSx500A (FW v4.0.xxxx or higher)

---

### Network

Communicator type	2G
GSM frequency	GSM 850, E-GSM 900, DCS 1800, PCS 1900

---

### Reporting

Supported receivers	UltraSync
---------------------	-----------

---

### Interfaces

Antenna	Yes, included
---------	---------------

---

### Electrical

Operating voltage	10 to 15 VDC (via ribbon cable from control panel)
Current consumption	20 mA (idle) 40 mA (GSM online) 340 mA (GSM max.)

---

### Physical

Physical dimensions	104 x 50 mm
Net weight	44 g

---

### Environmental

Operating temperature	-10 to +50°C
Relative humidity	95% noncondensing
Environment	EN50130-5 ; Class II - Indoor (general)

---

### Regulatory

Certification	EN50131 Grade 3
---------------	-----------------

---