




# TP-CP-ISO-25PK

25-pack TruPortal credential, classic ISO cards, proximity (EM), no magstripe, gloss/gloss

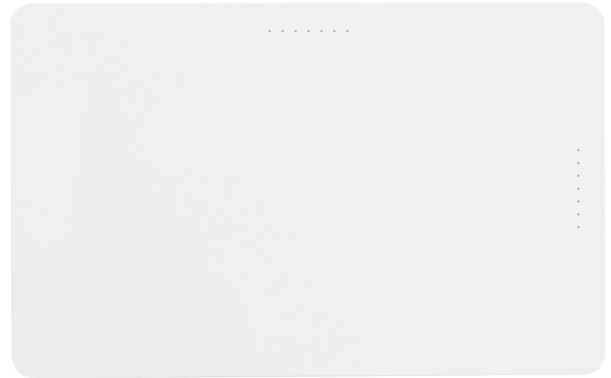

# TP-CP-ISO-25PK

25-pack TruPortal credential, classic ISO cards, proximity (EM), no magstripe, gloss/gloss

## Technical specifications

---

### System

Reading distance	1 to 5 cm
Custom data model	No
Card slot punch	No

### Technology

Credential type	Proximity
Credential driftsfrekvens	125 KHz
Support technology 125 KHz	GE ProxLite/CASI Prox

### Printing

Direct surface printing	Yes
Thermal transfer printing	Not recommended

### Ordering information

Minimum order quantity	1
Cards / tags in package	25
Special card order form required	No

### Physical

Surface cover	Glossy
Material	PVC
Form factor	CR80 (Credit)
Physical dimensions	55 x 85 x 20 mm
Net weight	150 g
Shipping weight	160 g
Colour	White

### Environmental

Operating temperature	-10 to 45°C
Storage temperature	-10 to 45°C
Relative humidity	5 to 95% noncondensing

### Regulatory

Compliance	RoHS
------------	------



As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit [uk.firesecurityproducts.com](http://uk.firesecurityproducts.com) online or contact your sales representative.

Last updated on 21 May 2024 - 17:24