



# TVM-4002

**TRUVISION 40" LED, VGA, HDMI, BNC, Audio Speaker, Stereo Audio In, FULL HD, 1920X1080**

## Overview

---

The LED TVM range of monitors is the latest advancement in TruVision monitors. Providing superior image quality through HDMI, VGA and BNC connections, these monitors are a great fit for today's demanding video surveillance market.

Whether displaying analog or IP resolutions, these monitors are designed to provide top image quality paired with industrial reliability.

These monitors are designed to perform 24/7 and are design with security applications in mind.

## Capabilities

---

The TVM-4002 is a 40" class monitor, offering HDMI, VGA and BNC connections. The monitor has two built in speakers and is provided with VESA wall mount holes, making them easy to combine with a variety of TruVision mounting accessories. The on screen display allows for full control of images settings such as brightness, contrast and colour temperature.



## Details

---

- 40" LED Backlight
- Full HD resolution
- 16:9 aspect ratio
- 1920 x 1080 recommended resolution
- 5,000:1 contrast ratio for crisp images
- 3D comb filter for optimal image quality
- Multiple inputs including BNC, VGA, HDMI
- BNC analog input

# TVM-4002

TRUVISION 40" LED, VGA, HDMI, BNC, Audio Speaker, Stereo Audio In, FULL HD, 1920X1080

## Technical specifications

### General

Technology	LED
VESA compatibility	100 x 100 mm
Filter type	3D Combfilter, Deinterlace
Included accessories	Manual, Power Cord, Remote Control
Panel lamp life	30,000 hours

### Display

Screen size	39.5"
Aspect ratio	16:9
Contrast ratio	5000:1
Viewing angle (H/V)	178° / 178°
Response time	8ms
Brightness	360 cd/m <sup>2</sup> (typ)
Compatible video standards	NTSC/PAL Auto Detect
Recommended resolution	1920 x 1080 @ 60 HZ

### Audio

Speaker power	2W x 2
Speakers	Built-in

### Interface

BNC video I/O	1/1
VGA video in	Yes
HDMI video in	1
RCA audio in	1
PC stereo in	Yes
Audio out	No

### Operations

Controls	Power, Up/Down, Left/Right, Source, OSD Menu
OSD	English, French, Spanish, German, Italian, Portuguese, Netherlands, Russian, Turkish, Polish
Remote control support	Yes

### Electrical

Power supply type	100 to 240 VAC
Power consumption	<60W

### Physical


Physical dimensions	907mm x 610 mm x 245mm
Net weight	11 kg
Shipping weight	13.8 kg
Colour	Black
Housing type	Plastic

### Environmental

Operating temperature	0 to 40°C
Storage temperature	-20 to 60°C
Relative humidity	10 to 85%
Environment	Indoor

### Regulatory

Compliance	CE
------------	----

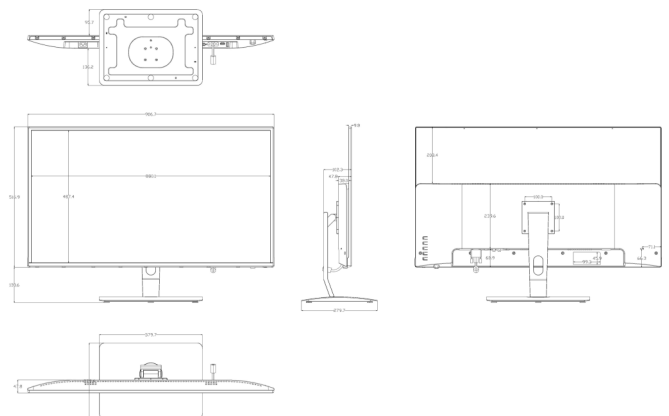

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit [uk.firesecurityproducts.com](http://uk.firesecurityproducts.com) online or contact your sales representative.

Last updated on 5 May 2023 - 9:54